



SNS COLLEGE OF TECHNOLOGY

An Autonomous Institution

Coimbatore-35



Accredited by NBA – AICTE and Accredited by NAAC – UGC with 'A++' Grade
Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

DEPARTMENT OF ELECTRONICS & COMMUNICATION ENGINEERING

23ECT203– DIGITAL SIGNAL PROCESSING

II YEAR/ IV SEMESTER

UNIT 1 – DISCRETE FOURIER TRANSFORM

TOPIC – REVIEW OF SIGNALS AND SYSTEMS



EMPATHY



1

- Clear Understanding of Signals

2

- To recollect Systems

3

- Analysis of Signals and Systems



SIGNALS




- **Signal:** A function of one or more independent variables which contains some information
- Radio Signal & TV Signal are **Electrical Signals**
- Sound Signal & Pressure Signal are **Non Electrical Signals**
- Signal is a function of time **i.e $f(t)$**





SIGNALS

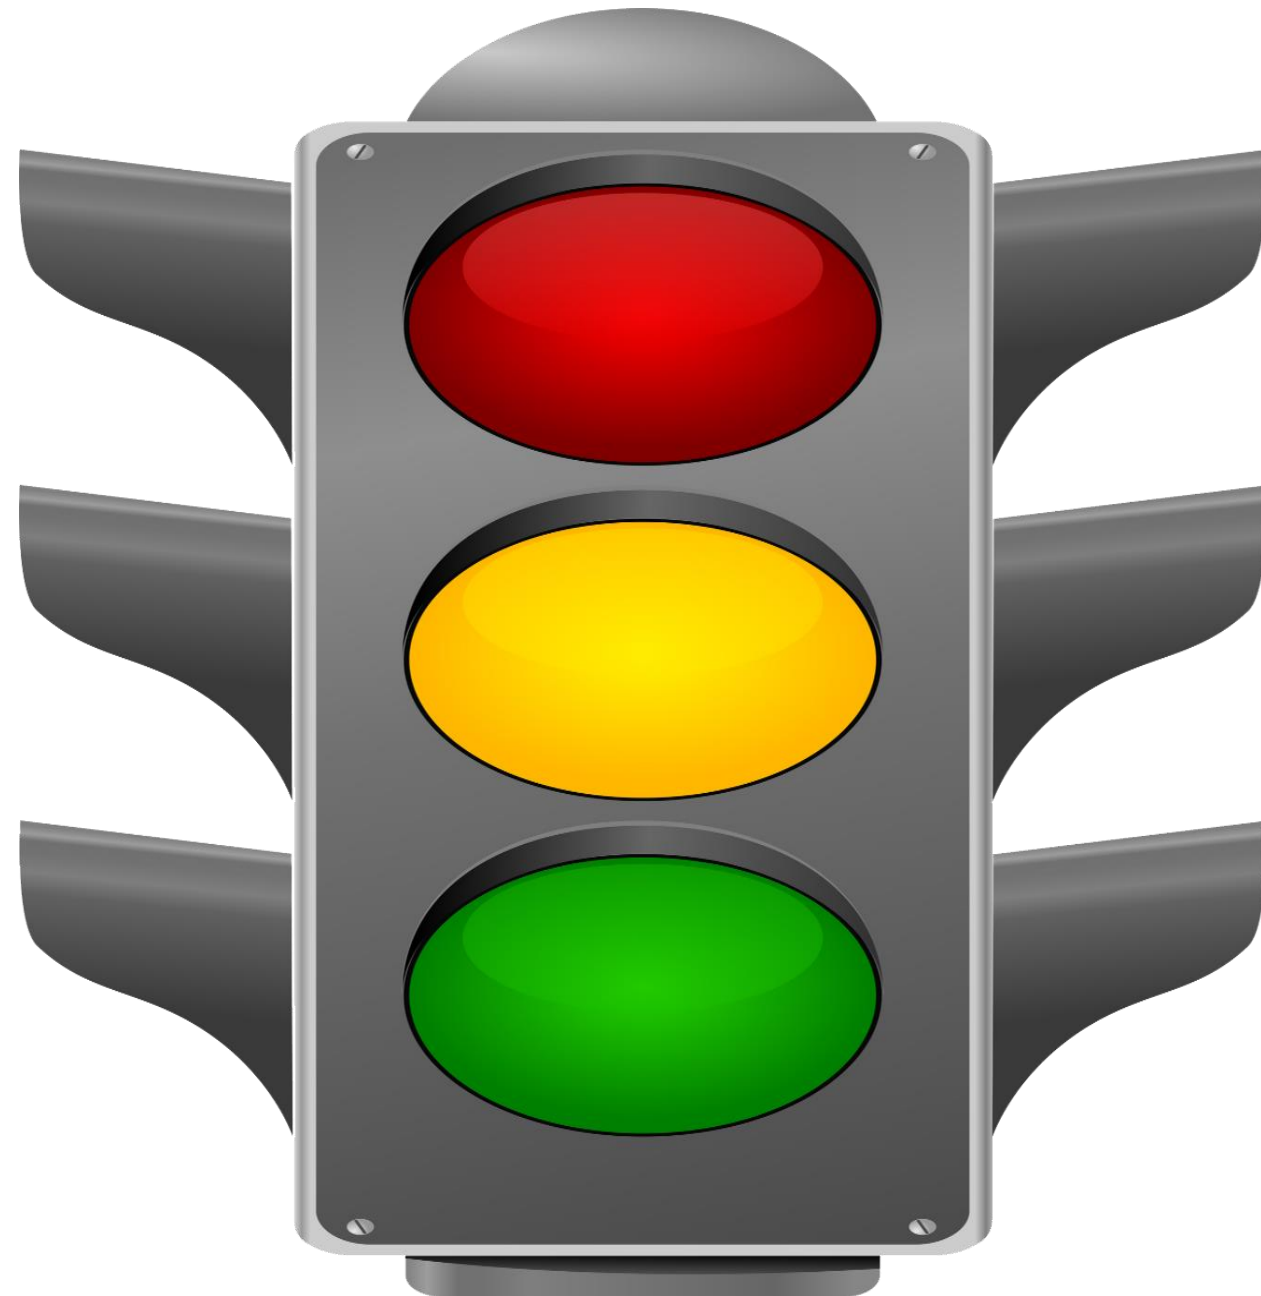




NOISE SIGNAL




- Noise is a Signal???
- **Yes**, Noise is also a signal which doesn't contains any information

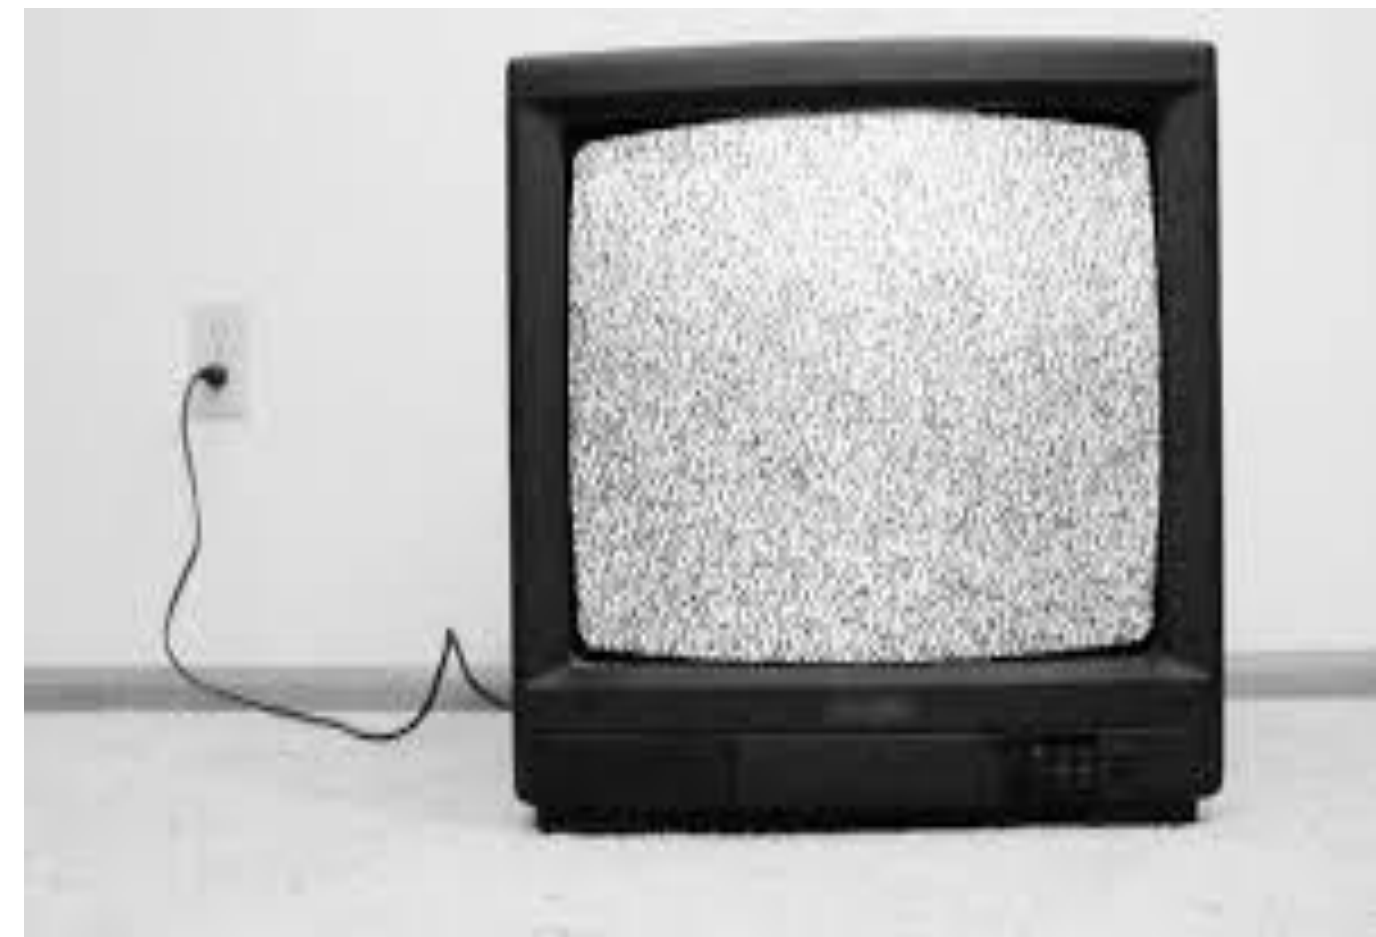




IS IT RELATED WITH COMMUNICATION

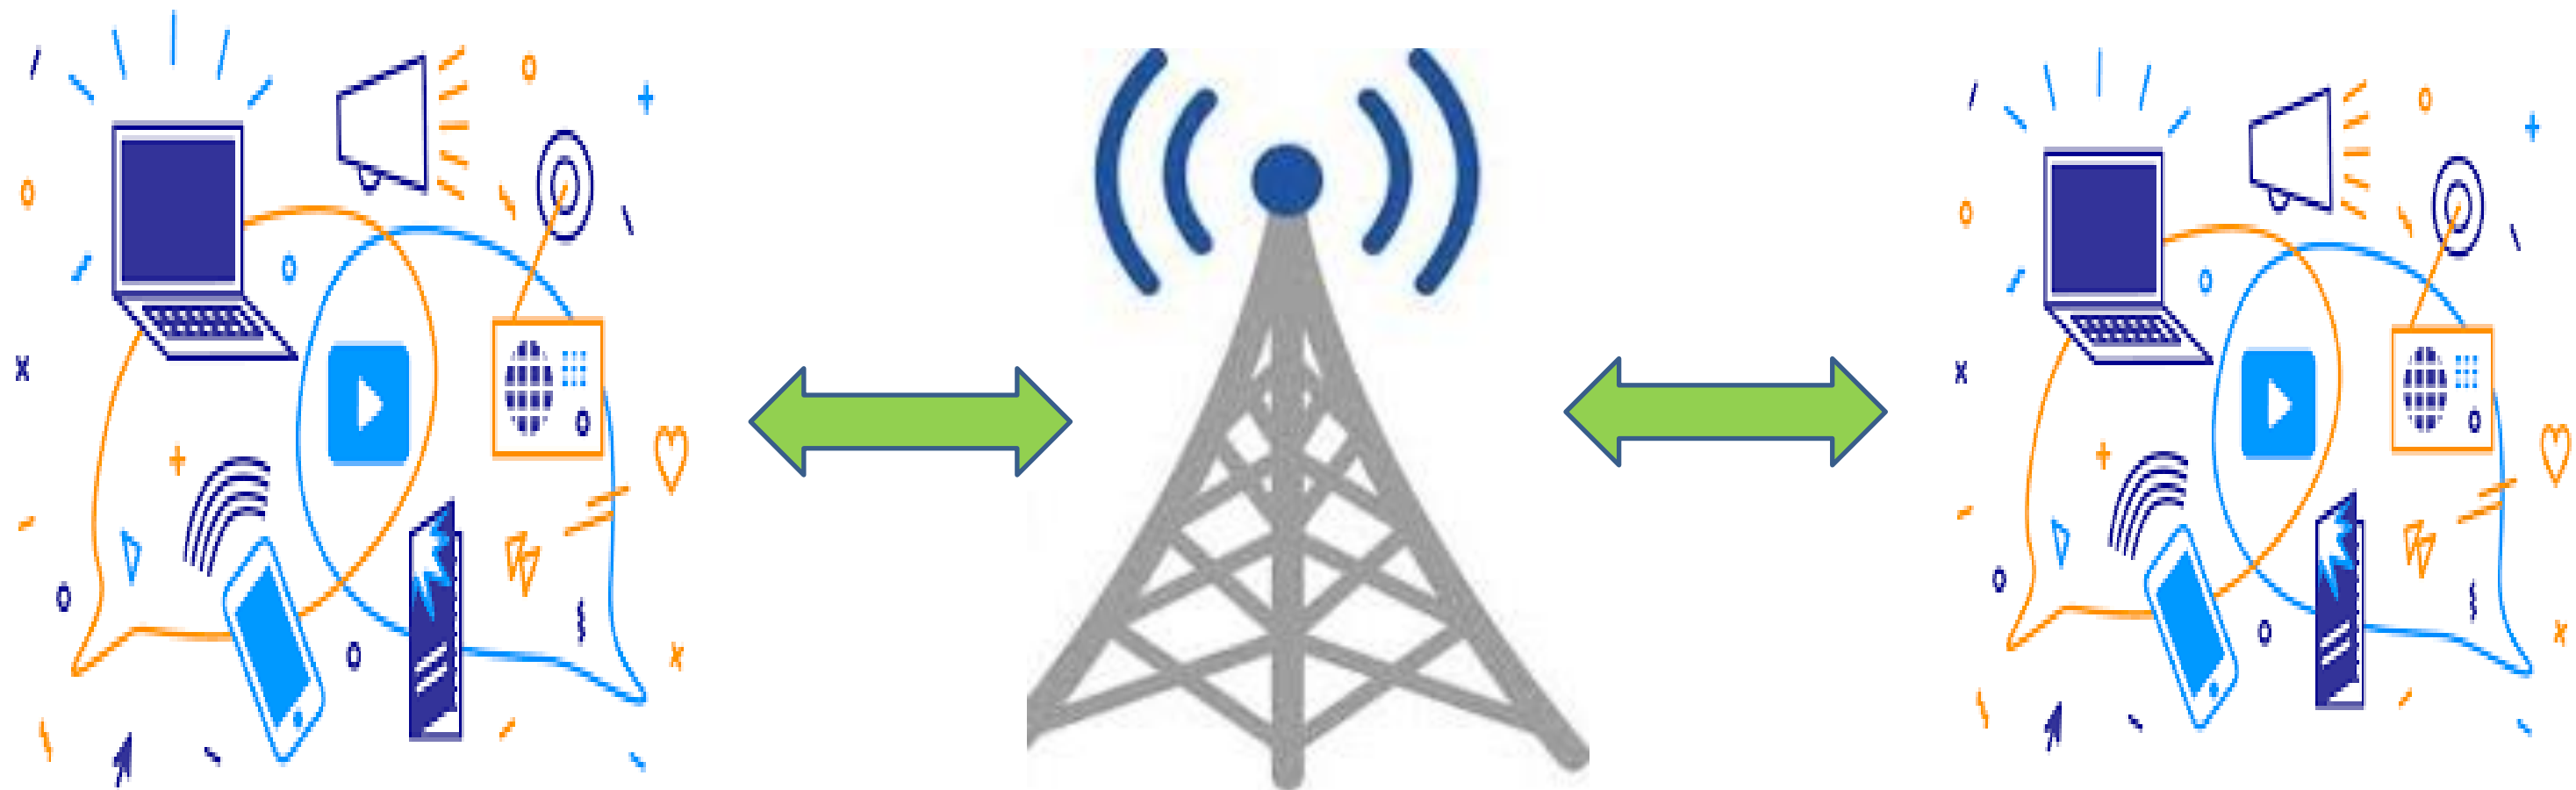



COMMUNICATION SYSTEM

- A communication system has an information signal plus noise signals
- It consists of an interconnection of smaller systems

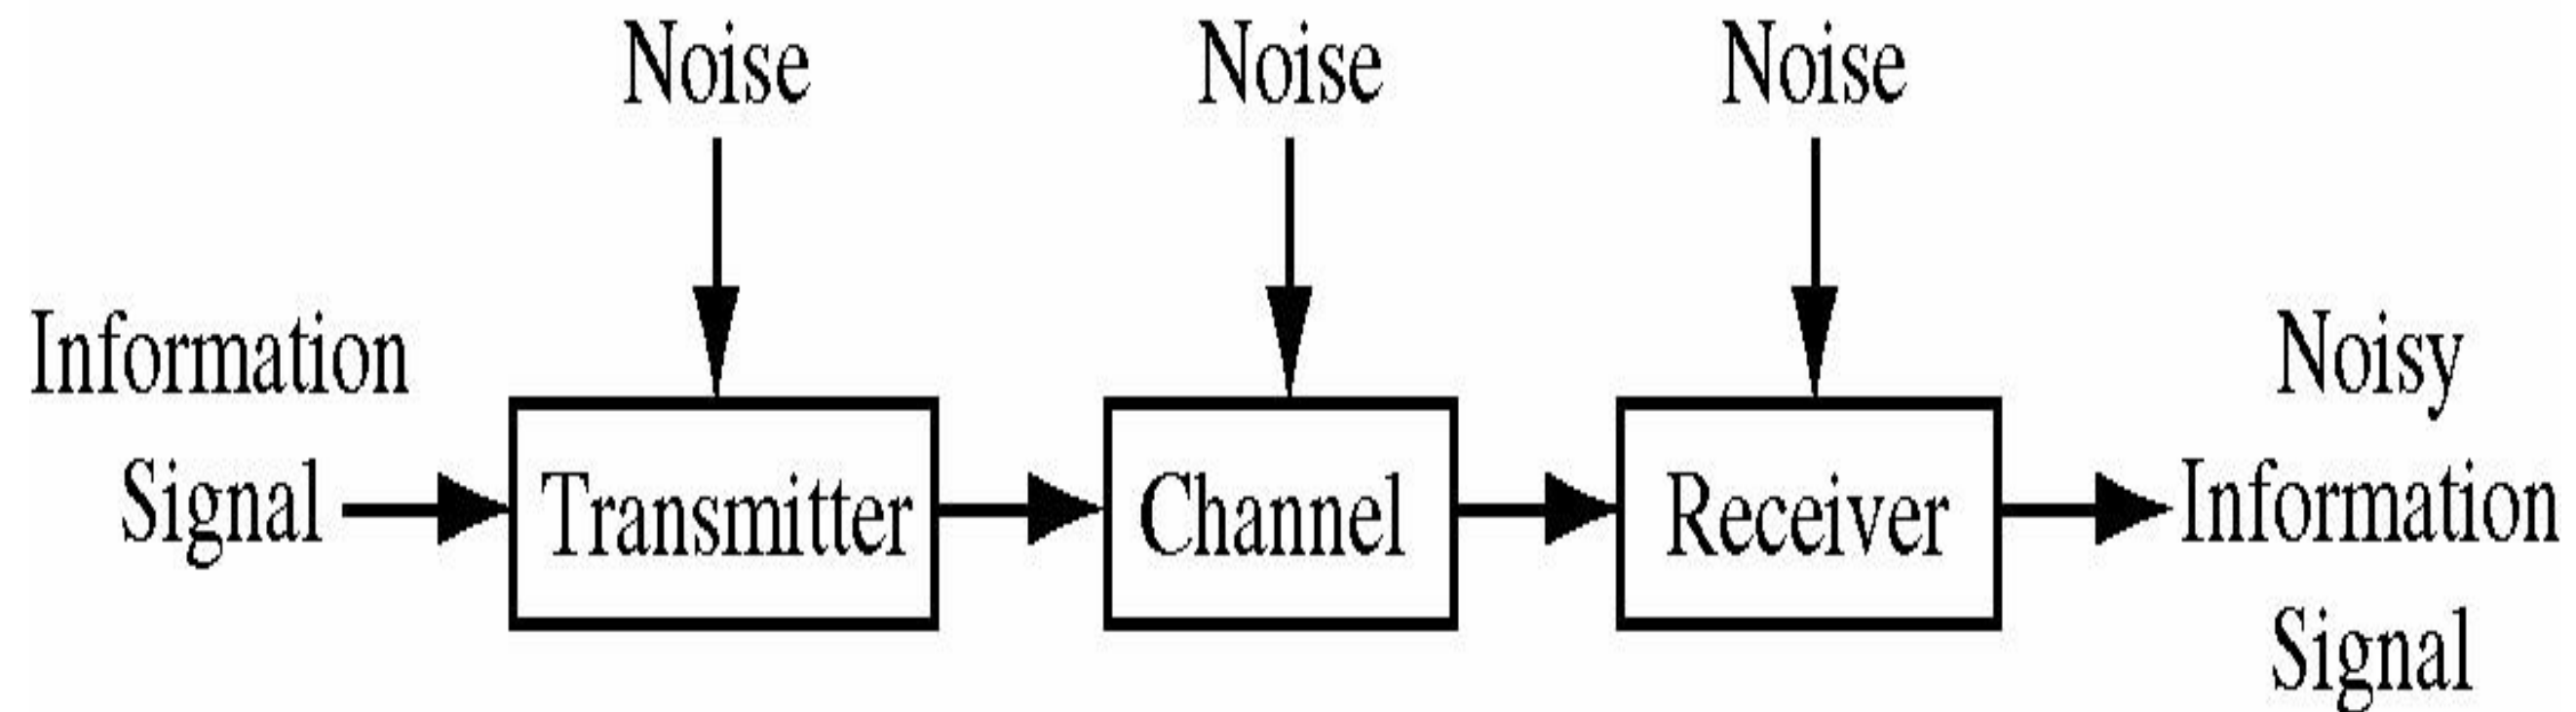



ANALOG SIGNALS



- A signal could be an analog quantity that means it is defined with respect to the time. It is a continuous signal.






ANALOG SIGNALS



- Human voice is an example of analog signals. When you speak, the voice that is produced travel through air in the form of pressure waves and thus belongs to a mathematical function, having independent variables of space and time and a value corresponding to air pressure.

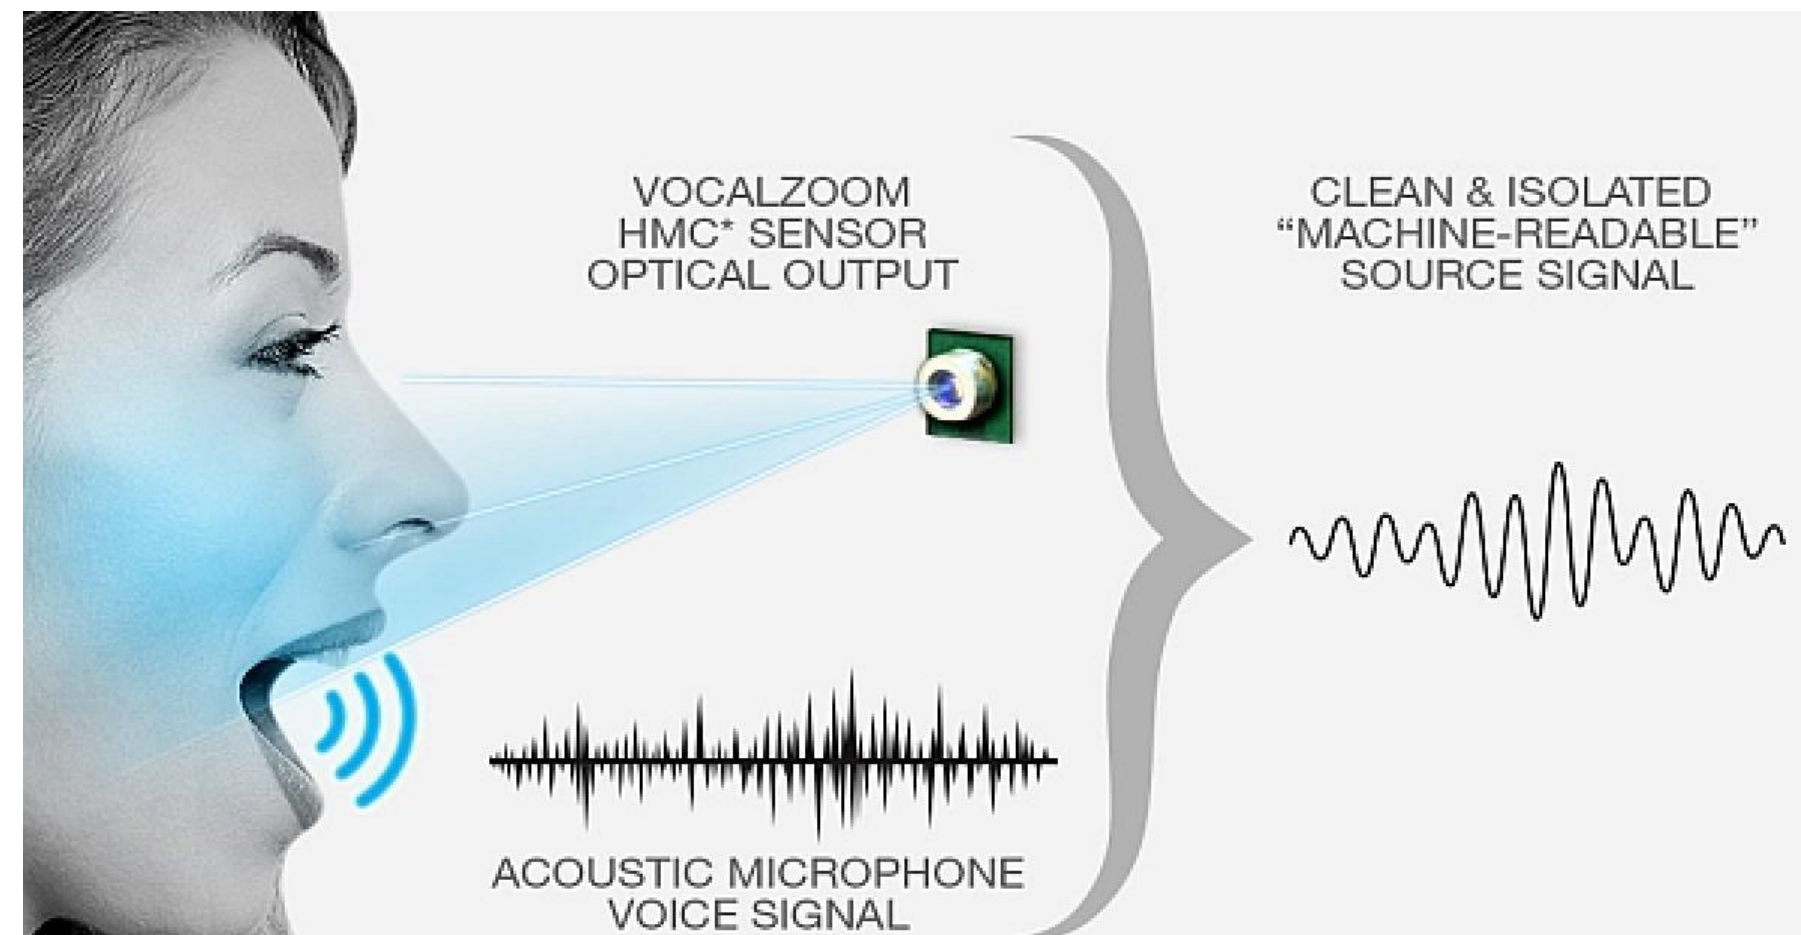





ANALOG AND DIGITAL SIGNAL



- **Analog Signal:** A signal that is defined for every instants of time is known as analog signal

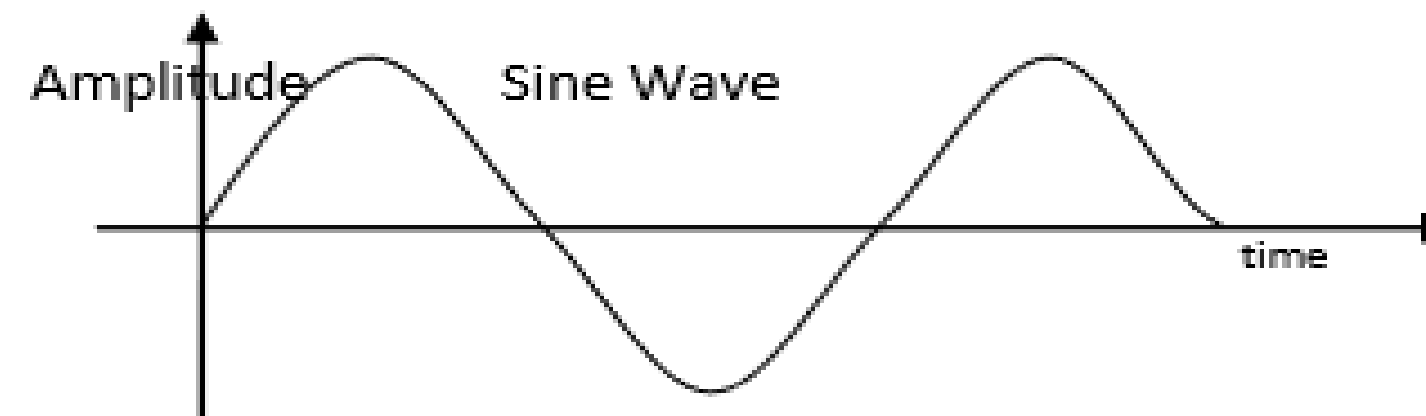

- **Digital Signal:** The signals that are discrete in time and quantized in amplitude is called digital signal

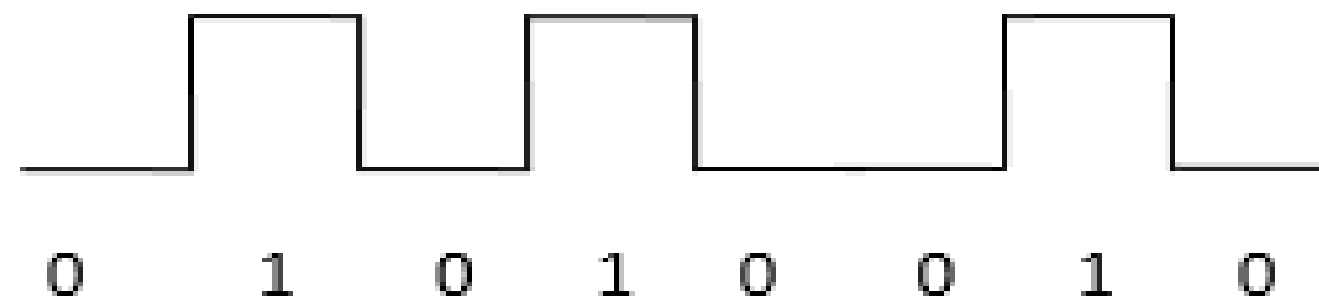



DIGITAL SIGNALS



Example:





CLASSIFICATION OF SIGNALS

- It can be classified into two types
 - Continuous time signal
 - Discrete time signal
- It can be further classified into four types
 - Periodic & Aperiodic Signal
 - Even and Odd Signal
 - Energy and Power Signal
 - Deterministic and Random Signal




CONTINUOUS & DISCRETE TIME SIGNAL



- **Continuous Time Signal:** A signal that is defined for every instants of time is known as continuous time signal
- Continuous time signals are continuous in amplitude and continuous in time.
- It is denoted by $x(t)$
- **Discrete Time Signal:** A signal that is defined for discrete instants of time is known as discrete time signal. Discrete time signals are continuous in amplitude and discrete in time.
- It is also obtained by sampling a continuous time signal.
- It is denoted by $x(n)$



CONTINUOUS & DISCRETE TIME SIGNAL

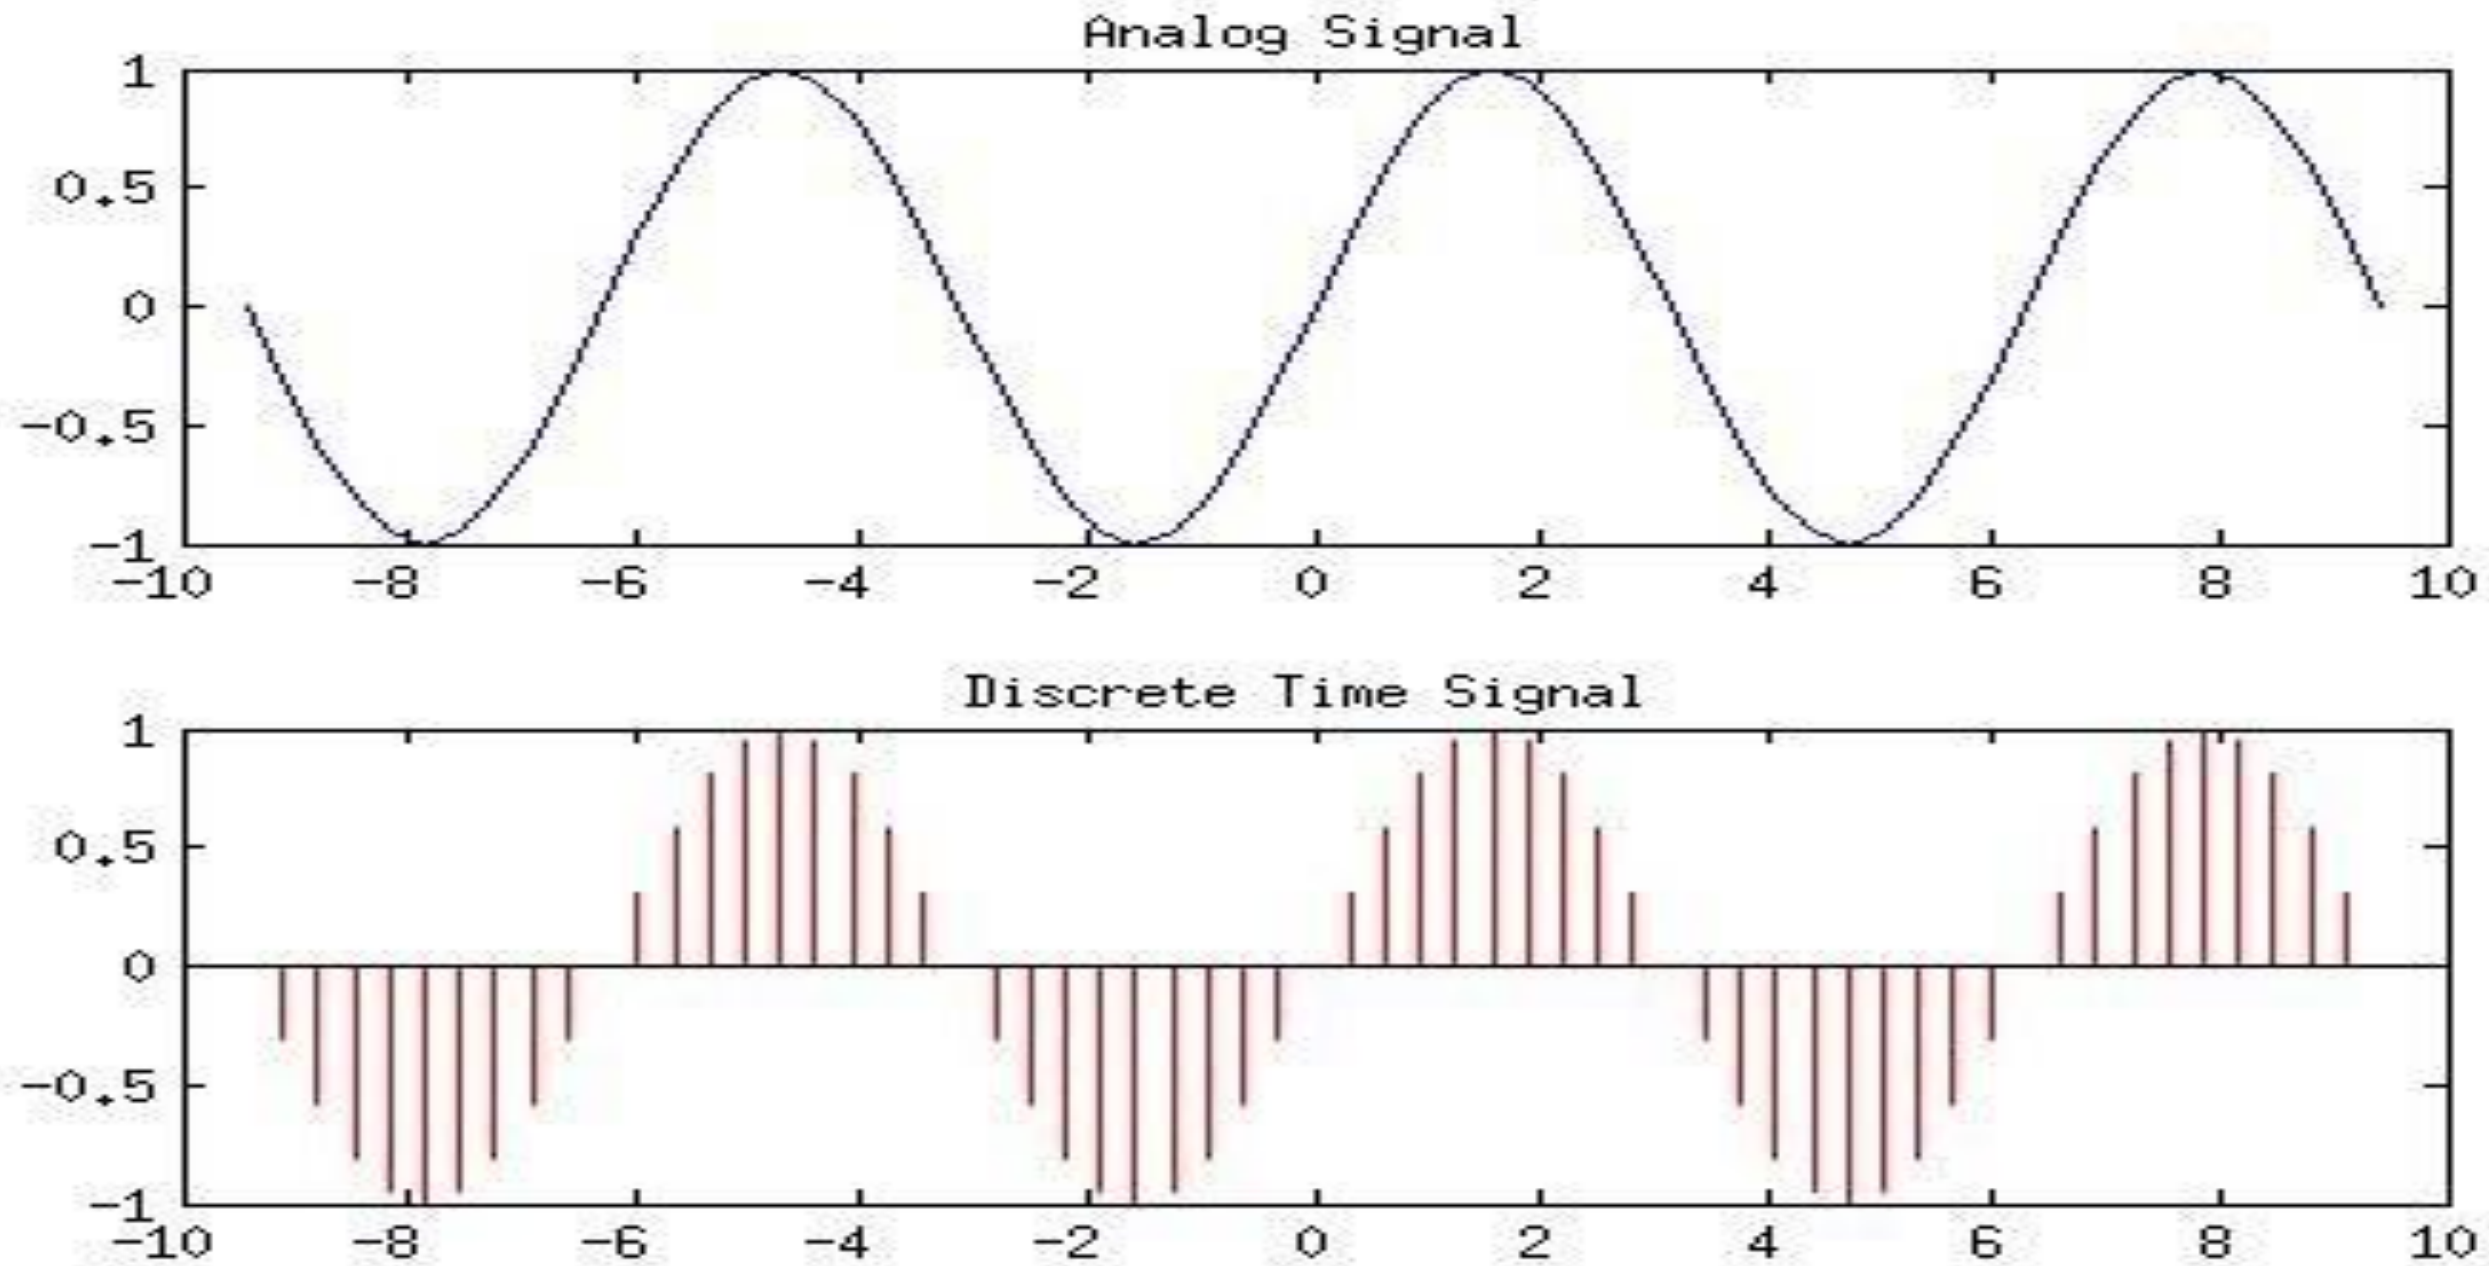



PERIODIC AND APERIODIC SIGNAL



- A **periodic signal** is a signal that repeats its pattern over time at regular intervals, known as the period. In other words, after a certain amount of time, the signal will repeat exactly as it did before.
- A discrete periodic signal $x(n)$ is one that repeats its pattern over time with a fixed period N ,
- Mathematically, this can be represented as:

$$x(n)=x(n+N),$$

where N is the period of the signal, and n is any integer representing the discrete time index.

- This equation signifies that the signal's behavior repeats every N samples.



PERIODIC AND APERIODIC SIGNAL



- An **aperiodic signal** is a signal that does not exhibit any repetitive pattern over time. Unlike periodic signals, which repeat their patterns at regular intervals, aperiodic signals do not have a fixed period. This means that the signal's behavior does not repeat identically over any finite duration..




PERIODIC AND APERIODIC SIGNAL




CT Periodic Signal


$$x(t) = x(t+T)$$

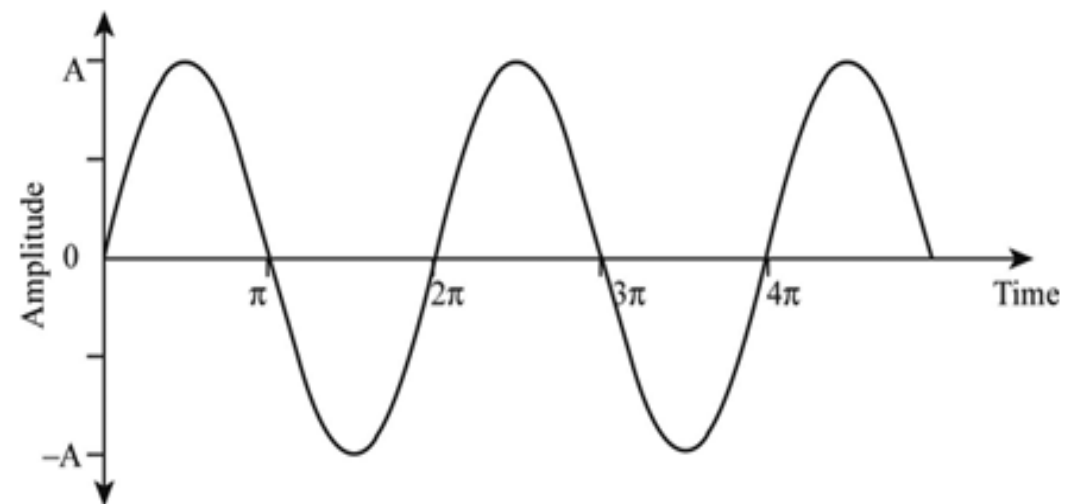

DT Periodic Signal

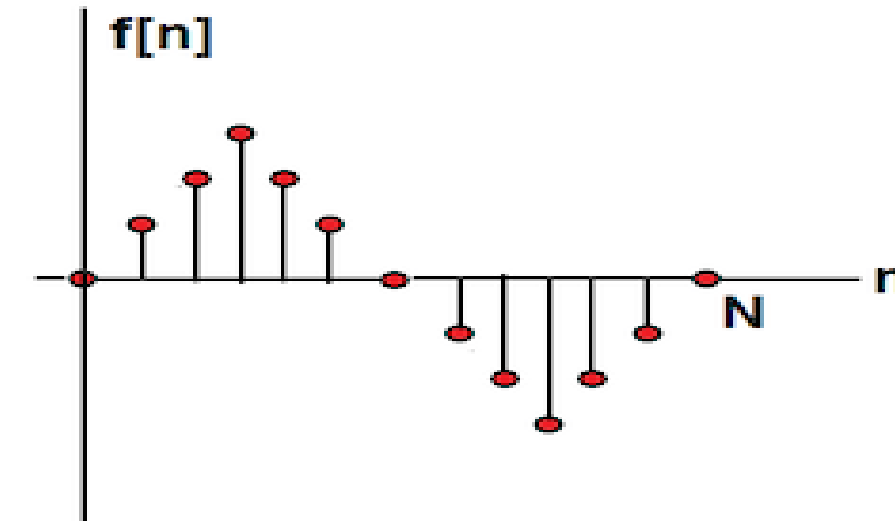

Aperiodic Signal

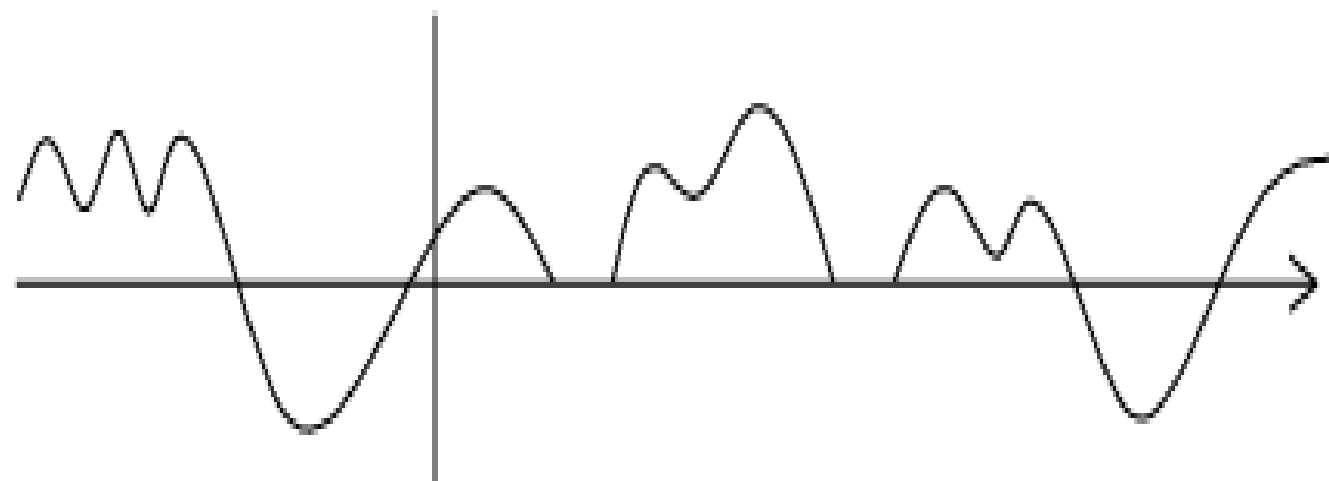



EVEN AND ODD SIGNAL

- **Even Signal:** A Signal is said to be an even signal if the inversion of time axis does not change the amplitude. **Eg. Cosine Wave: $\cos(-\theta) = \cos \theta$**
- Even signal satisfies the condition $x(-n) = x(n)$

$$X_e(n) = \{x(n) + x(-n)\}/2$$

- **Odd Signal:** A signal is said to be an odd signal if the inversion of time axis also inverse the amplitude of the signal.

Eg. Sine Wave: $\sin(-\theta) = -\sin \theta$

- Odd signal satisfies the condition $x(-n) = -x(n)$

$$X_o(n) = \{x(n) - x(-n)\}/2$$



ENERGY AND POWER SIGNAL



- **Energy Signal:** The signal which has finite energy and zero average power. $0 < E < \infty$

$$\text{Energy } E = \lim_{T \rightarrow \infty} \int_{-T}^T |x(t)|^2 dt$$

$$\text{Energy } E = \lim_{N \rightarrow \infty} \sum_{n=-N}^N |x(n)|^2$$

- **Power Signal:** The signal which has finite average power and infinite energy. $0 < P < \infty$

$$P = \lim_{T \rightarrow \infty} \frac{1}{2T} \int_{-T}^T |x(t)|^2 dt$$

$$P = \lim_{N \rightarrow \infty} \frac{1}{2N + 1} \sum_{n=-N}^N |x(n)|^2$$




DETERMINISTIC AND RANDOM SIGNAL




- **Deterministic signal:** A signal which can be completely represented by any mathematical equation

Eg: Sinusoidal Signal

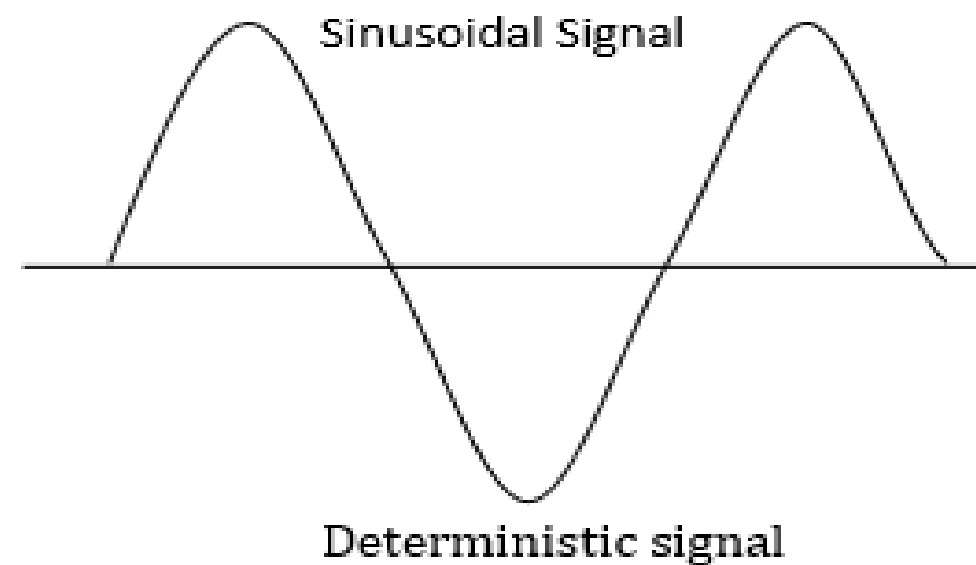

- **Random signal:** A signal which cannot be completely represented by any mathematical equation

Eg: Noise Signal

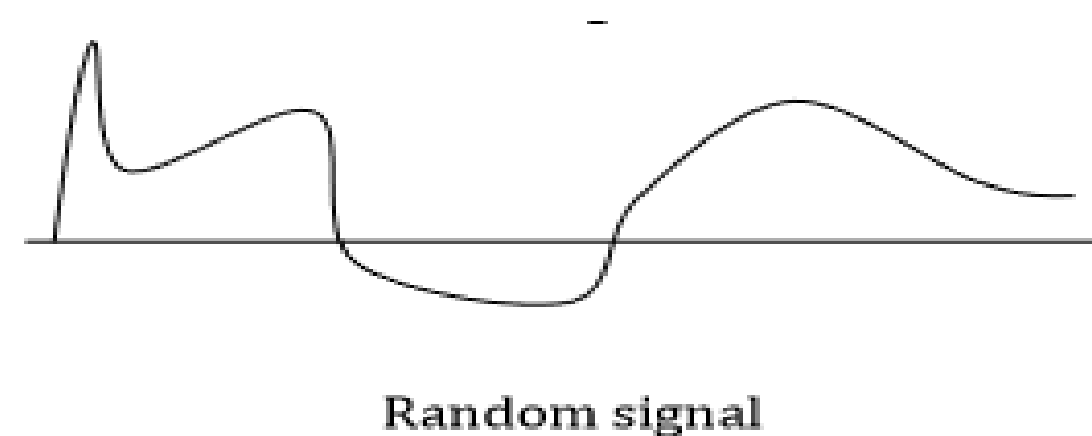





DISCRETE TIME SIGNALS



$$u(n) = 1 \text{ for } n \geq 0$$
$$= 0 \text{ for } n < 0$$

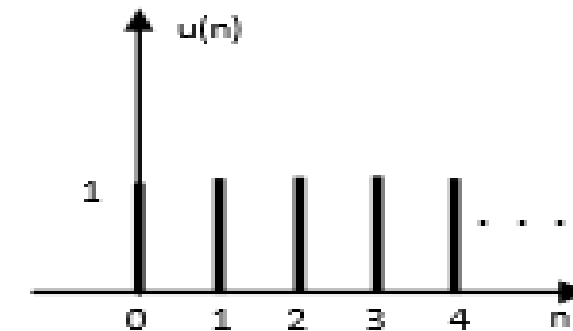


Unit step signal

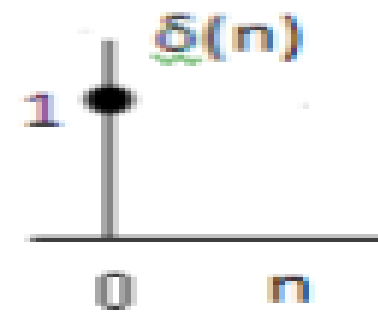

Unit Impulse signal

$$\delta(n) = 1 \text{ for } n = 0$$
$$= 0 \text{ for } n \neq 0$$

$$r(n) = n \text{ for } n \geq 0$$
$$= 0 \text{ for } n < 0$$

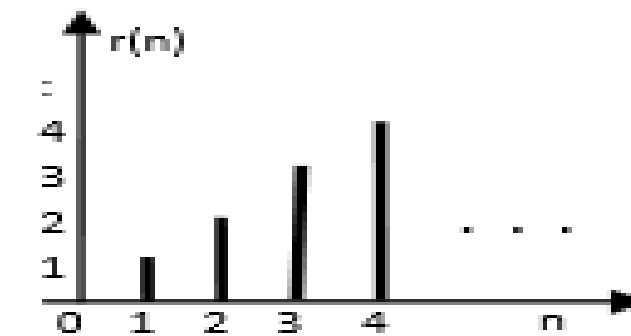


Unit Ramp signal



SYSTEM



- A System is a set of elements or functional blocks that are connected together to produce an output with response to input signal
- Systems process input signals to produce output signals
- Eg. Audio amplifier, Receiver

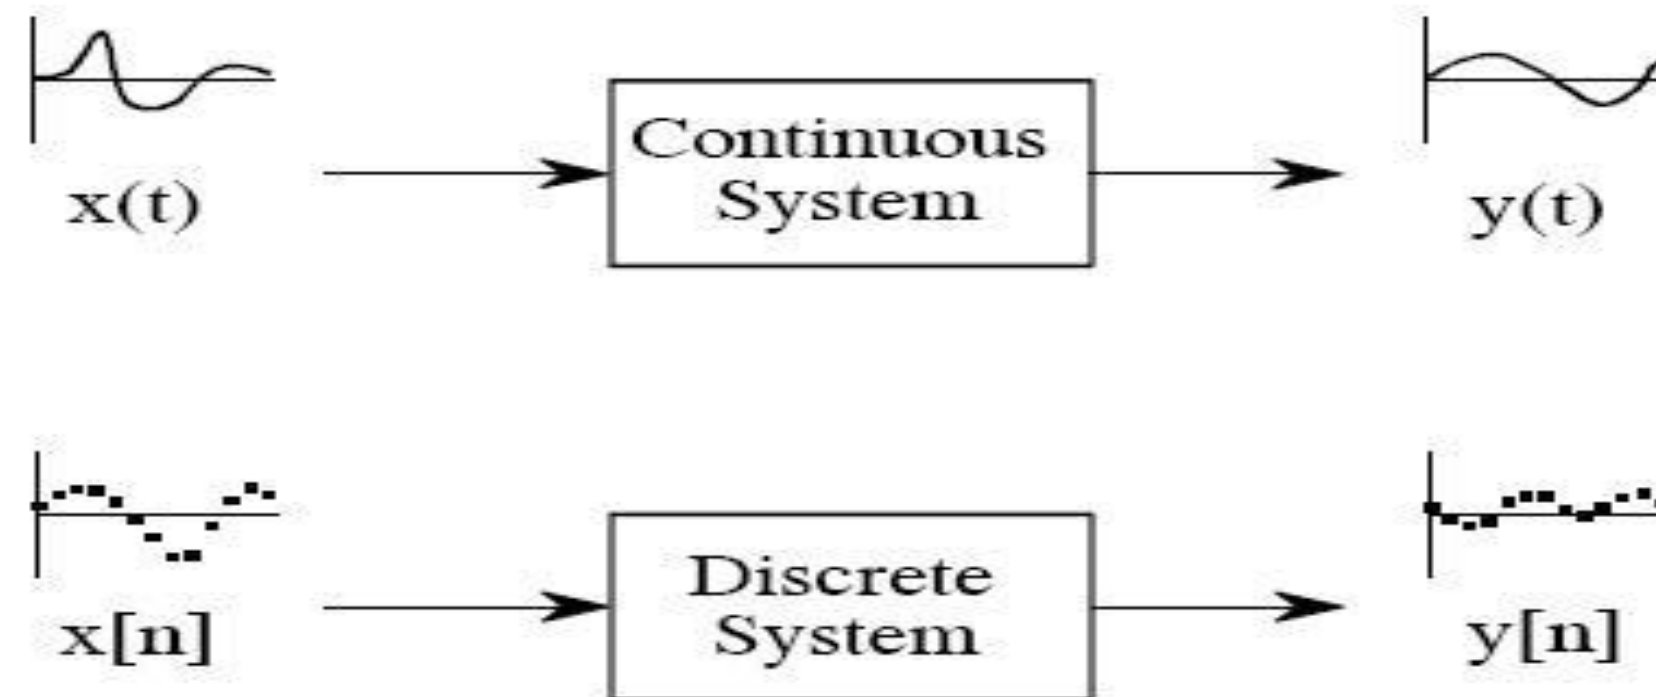




SYSTEMS



Example: Audio Amplifier

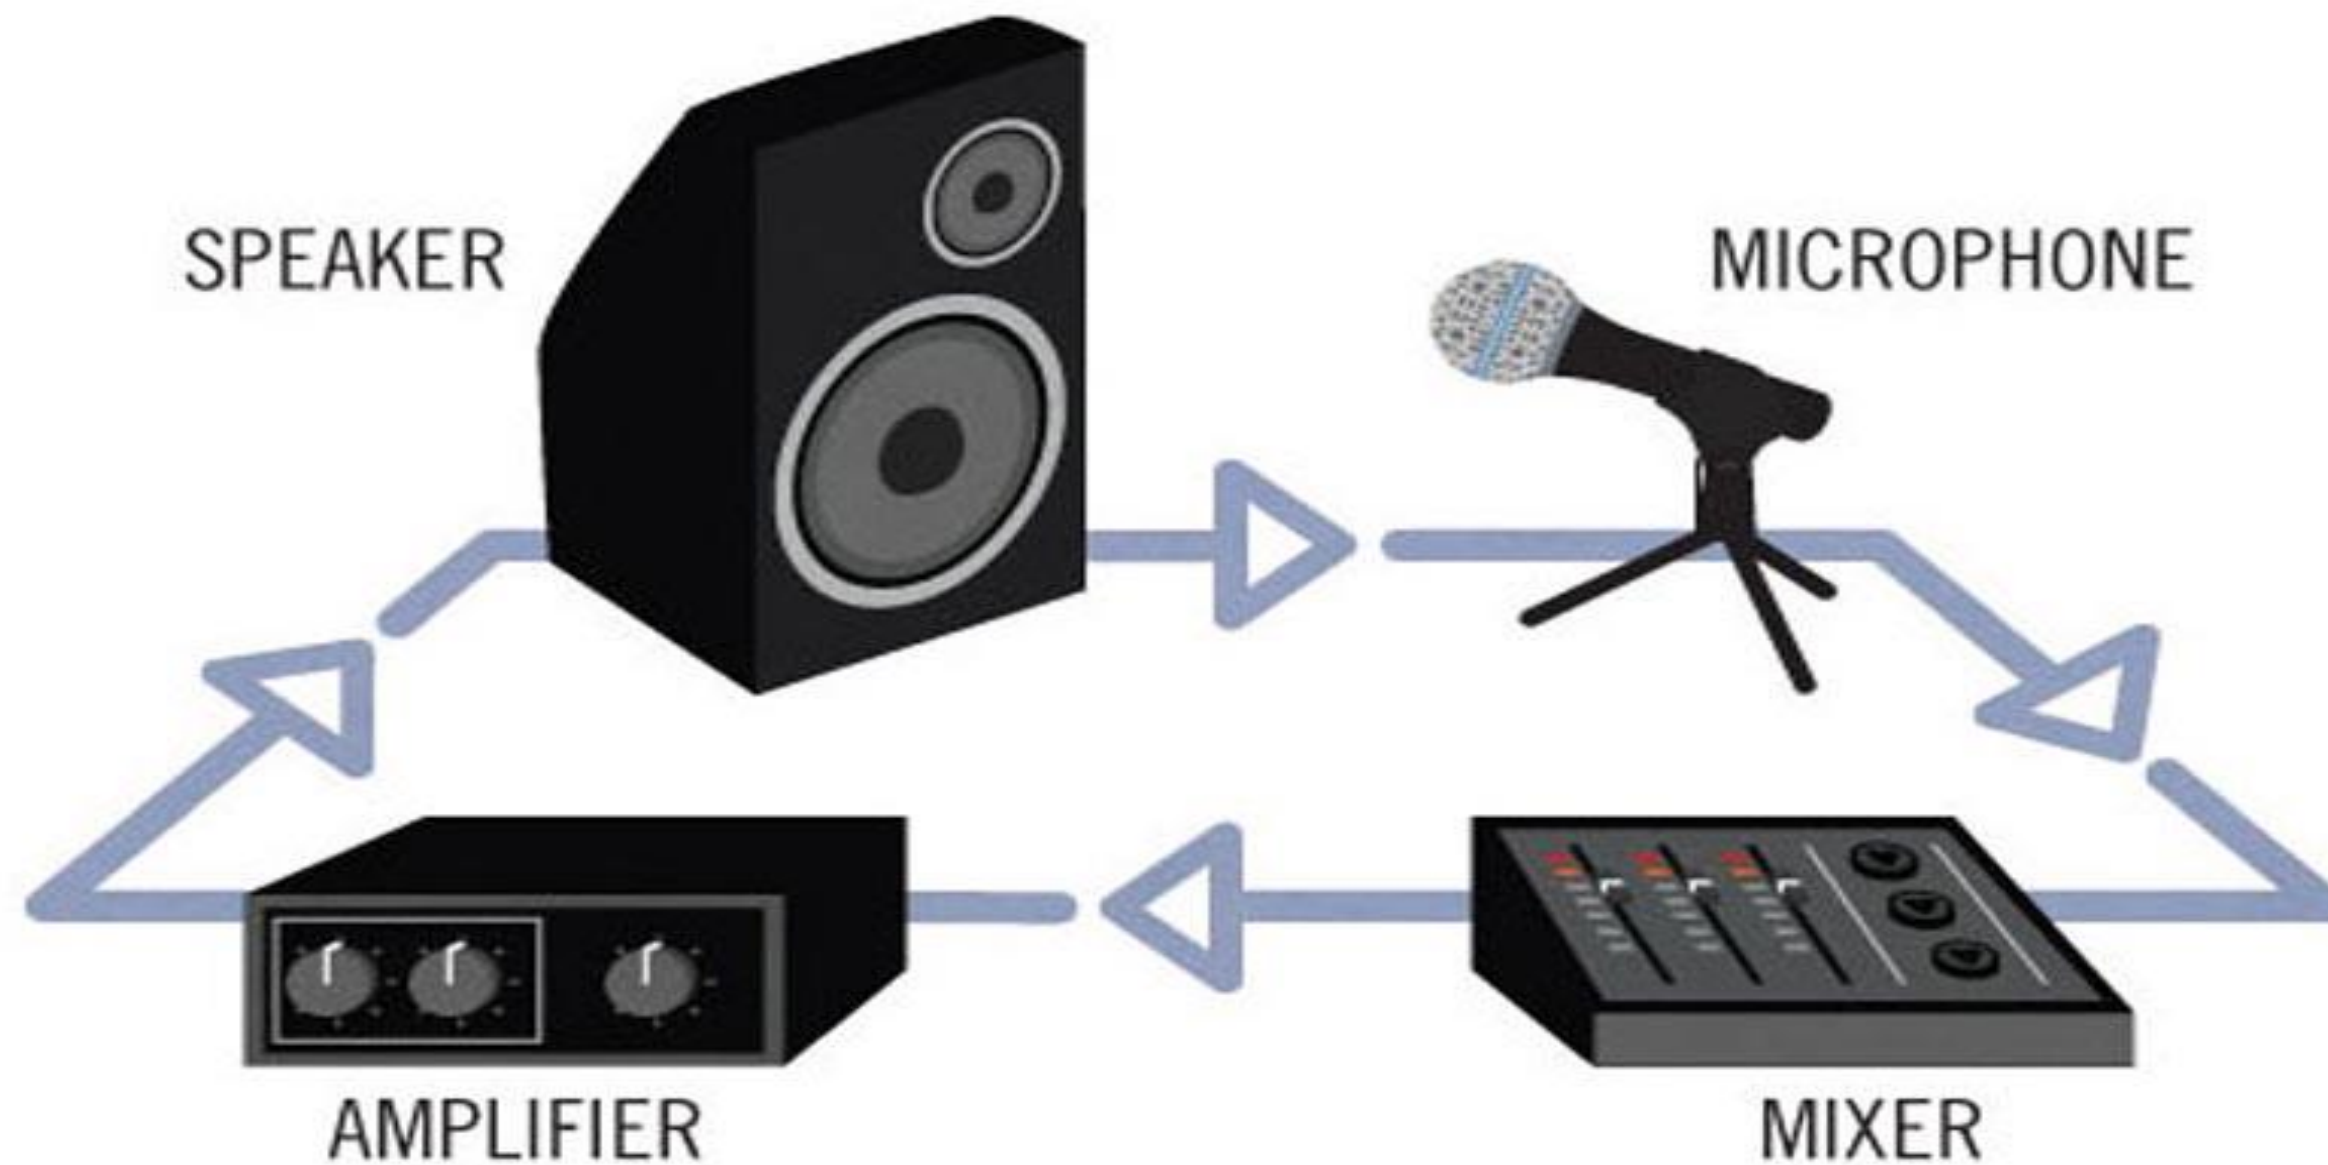



SYSTEMS



Example: TV Signal Broadcasting





CT & DT SYSTEM



- **Continuous Time System:** It operates on a continuous time signal (input or excitation) produces another continuous time signal (output or response)



- **Response $y(t) = T \{x(t)\}$**

- **Discrete Time System:** It operates on a discrete time signal (input or excitation) and produces another discrete time signal (output or response)



- **Response $y(n) = N \{x(n)\}$**



APPLICATION AREAS



- Communications
- Audio and Speech Processing
- Image, Video Processing
- Circuit Design
- Biomedical Engineering
- Military Applications



APPLICATIONS



- Acoustics
- Communications: Transmission in mobile phones, GPS, radar and sonar
- Multimedia: Compress signals to store data such as CDs, DVDs






APPLICATIONS



- Biomedical: Extract information from biological signals
- Electrocardiogram (ECG) electrical signals generated by the heart
- Electroencephalogram (EEG) electrical signals generated by the brain
- Medical Imaging
- Biometrics: Fingerprint identification and iris recognition

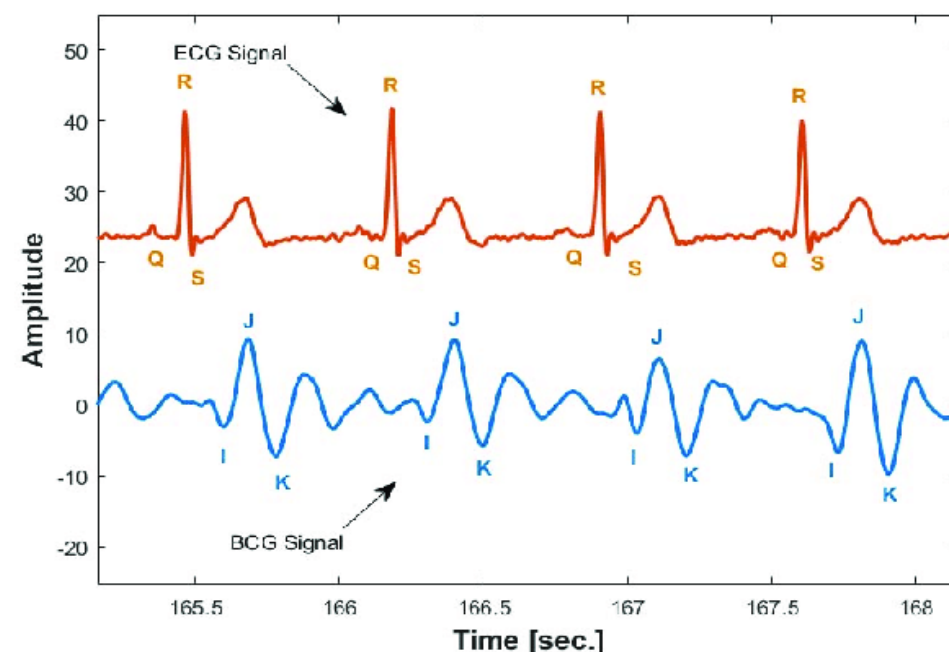



ASSESSMENT



1. A signal which contains -----
2. List the classification of signals.
3. What is meant by Periodic and Aperiodic Signal.
4. A signal that is defined for every instants of time is known as -----
5. Give some applications of signals.
6. Define System and mention its types.
7. What is meant by deterministic and Random Signal.
8. Define Even and Odd Signal.



THANK YOU