



# **SNS COLLEGE OF TECHNOLOGY**

**Coimbatore-35.**

**An Autonomous Institution**



**Accredited by NBA – AICTE and Accredited by NAAC – UGC with ‘A++’ Grade  
Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai**

**COURSE NAME : 23CST202 – OPERATING SYSTEMS**

**II YEAR/ IV SEMESTER**

**UNIT – III STORAGE MANAGEMENT**

**Topic: Virtual Memory**

**Dr.V.Savitha**  
**Associate Professor**  
**Department of Computer Science and Engineering**



# Background



- **Virtual memory** –separation of user logical memory from physical memory
  - Only part of the program needs to be in memory for execution
  - Logical address space can therefore be much larger than physical address space
  - Allows address spaces to be shared by several processes
  - Allows for more efficient process creation
  - More programs running concurrently
  - Less I/O needed to load or swap processes




# Background (Cont.)



- **Virtual address space** – logical view of how process is stored in memory
  - Usually start at address 0, contiguous addresses until end of space
  - Meanwhile, physical memory organized in page frames
  - MMU must map logical to physical
- Virtual memory can be implemented via:
  - **Demand paging**
  - **Demand segmentation**




## Virtual Memory That is Larger Than Physical Memory

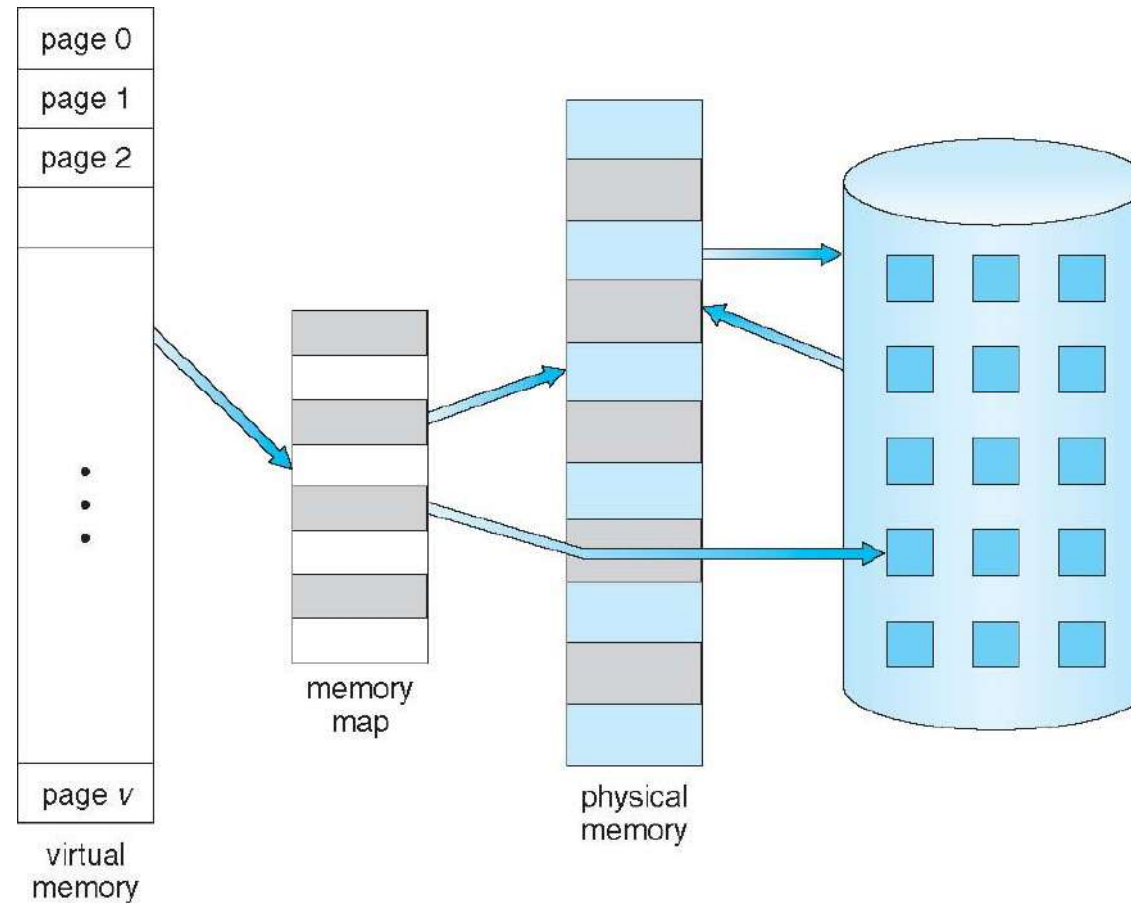



# Data Structure

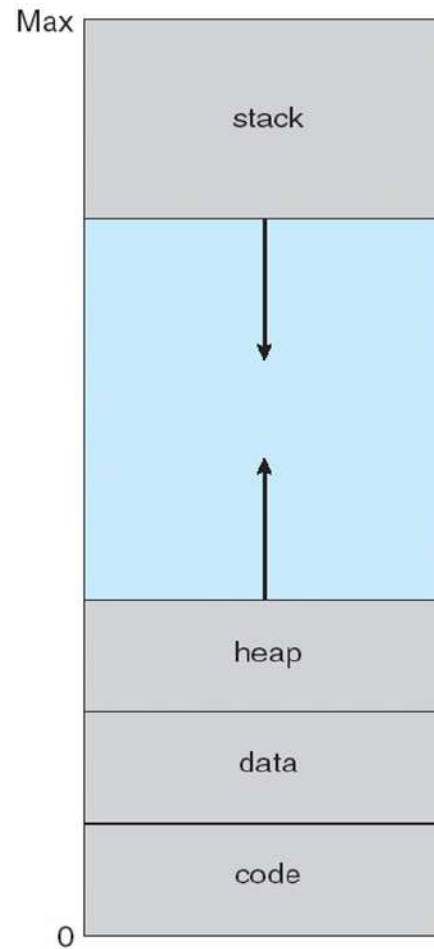




# Demand Paging



- Could bring entire process into memory at load time
- Or bring a page into memory only when it is needed
  - Less I/O needed, no unnecessary I/O
  - Less memory needed
  - Faster response
  - More users
- Similar to paging system with swapping (diagram on right)
- Page is needed  $\Rightarrow$  reference to it
  - invalid reference  $\Rightarrow$  abort
  - not-in-memory  $\Rightarrow$  bring to memory
- **Lazy swapper** – never swaps a page into memory unless page will be needed
  - Swapper that deals with pages is a **pager**

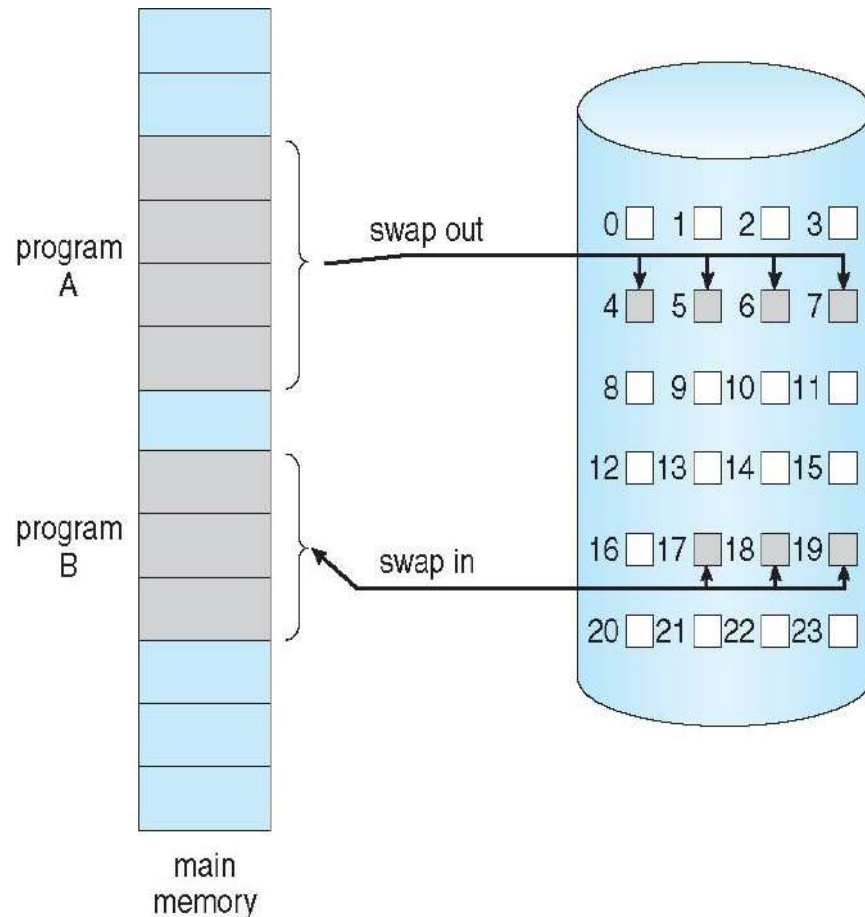



# Basic Concepts



- With swapping, pager guesses which pages will be used before swapping out again
- Instead, pager brings in only those pages into memory
- How to determine that set of pages?
  - Need new MMU functionality to implement demand paging
- If pages needed are already **memory resident**
  - No difference from non demand-paging
- If page needed and not memory resident
  - Need to detect and load the page into memory from storage
    - Without changing program behavior
    - Without programmer needing to change code



# Valid-Invalid Bit

- With each page table entry a valid–invalid bit is associated (**v**  $\Rightarrow$  in-memory – **memory resident**, **i**  $\Rightarrow$  not-in-memory)
- Initially valid–invalid bit is set to **i** on all entries
- Example of a page table snapshot:

Frame #	valid-invalid bit
	<b>v</b>
	<b>v</b>
	<b>v</b>
	<b>i</b>
...	
	<b>i</b>
	<b>i</b>

page table

- During MMU address translation, if valid–invalid bit in page table entry is **i**  $\Rightarrow$  page fault





## Page Table When Some Pages Are Not in Main Memory



0	A
1	B
2	C
3	D
4	E
5	F
6	G
7	H


logical  
memory

	valid-invalid bit
frame	
0	4 v
1	i
2	6 v
3	i
4	i
5	9 v
6	i
7	i

page table

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15

physical memory

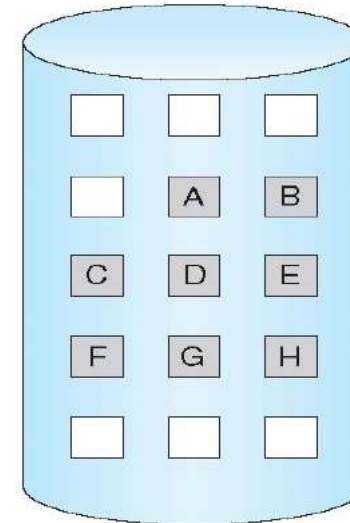



# Page Fault



- If there is a reference to a page, first reference to that page will trap to operating system:

## page fault

1. Operating system looks at another table to decide:
  - Invalid reference  $\Rightarrow$  abort
  - Just not in memory
2. Find free frame
3. Swap page into frame via scheduled disk operation
4. Reset tables to indicate page now in memory  
Set validation bit = **v**
5. Restart the instruction that caused the page fault



# Steps in Handling a Page Fault

