



# **SNS COLLEGE OF TECHNOLOGY**

**Coimbatore-35.**

**An Autonomous Institution**



**Accredited by NBA – AICTE and Accredited by NAAC – UGC with ‘A++’ Grade  
Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai**

**COURSE NAME : 23CST202 – OPERATING SYSTEMS**

**II YEAR/ IV SEMESTER**

**UNIT – III STORAGE MANAGEMENT**

**Topic: Allocation of Frames and Thrashing**

**Dr.V.Savitha**  
**Associate Professor**  
**Department of Computer Science and Engineering**



# Allocation of Frames



- Each process needs ***minimum*** number of frames
- Example: IBM 370 – 6 pages to handle SS MOVE instruction:
  - instruction is 6 bytes, might span 2 pages
  - 2 pages to handle *from*
  - 2 pages to handle *to*
- ***Maximum*** of course is total frames in the system
- Two major allocation schemes
  - fixed allocation
  - priority allocation
- Many variations



# Fixed Allocation



- Equal allocation – For example, if there are 100 frames (after allocating frames for the OS) and 5 processes, give each process 20 frames
  - Keep some as free frame buffer pool
- Proportional allocation – Allocate according to the size of process
  - Dynamic as degree of multiprogramming, process sizes change

$s_i$  = size of process  $p_i$

$$S = \sum s_i$$

$m$  = total number of frames

$$a_i = \text{allocation for } p_i = \frac{s_i}{S} \times m$$

$$m = 64$$

$$s_1 = 10$$

$$s_2 = 127$$

$$a_1 = \frac{10}{137} \times 62 \approx 4$$

$$a_2 = \frac{127}{137} \times 62 \approx 57$$



# Priority Allocation



- Use a proportional allocation scheme using priorities rather than size
- If process  $P_i$  generates a page fault,
  - select for replacement one of its frames
  - select for replacement a frame from a process with lower priority number



# Global vs. Local Allocation



- **Global replacement** – process selects a replacement frame from the set of all frames; one process can take a frame from another
  - But then process execution time can vary greatly
  - But greater throughput so more common
  
- **Local replacement** – each process selects from only its own set of allocated frames
  - More consistent per-process performance
  - But possibly underutilized memory




# Thrashing



- If a process does not have “enough” pages, the page-fault rate is very high
  - Page fault to get page
  - Replace existing frame
  - But quickly need replaced frame back
  - This leads to:
    - Low CPU utilization
    - Operating system assumes - increase the degree of multiprogramming
    - Another process added to the system
- **Thrashing**  $\equiv$  a process is busy swapping pages in and out



## Thrashing (Cont.)

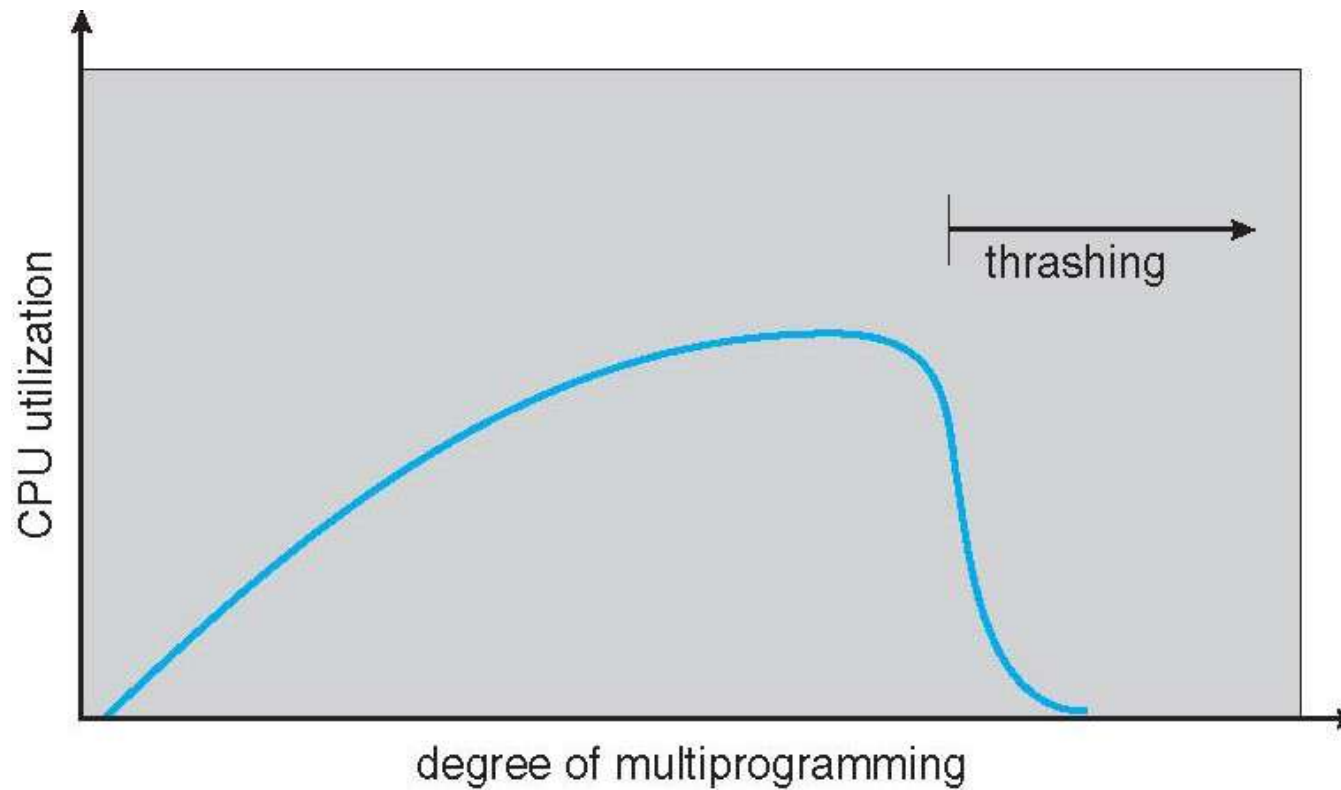



# Demand Paging and Thrashing



- Why does demand paging work?

## Locality model

- Process migrates from one locality to another
  - Localities may overlap
- 
- Why does thrashing occur?  
 $\Sigma$  size of locality > total memory size
  - Limit effects by using local or priority page replacement







# Working-Set Model



- $\Delta \equiv$  working-set window  $\equiv$  a fixed number of page references  
Example: 10,000 instructions
- $WSS_i$  (working set of Process  $P_i$ ) =  
total number of pages referenced in the most recent  $\Delta$  (varies in time)
  - if  $\Delta$  too small will not encompass entire locality
  - if  $\Delta$  too large will encompass several localities
  - if  $\Delta = \infty \Rightarrow$  will encompass entire program
- $D = \Sigma WSS_i \equiv$  total demand frames
  - Approximation of locality
- if  $D > m \Rightarrow$  Thrashing
- Policy if  $D > m$ , then suspend or swap out one of the processes

page reference table

... 2 6 1 5 7 7 7 7 5 1 6 2 3 4 1 2 3 4 4 4 3 4 3 4 4 4 1 3 2 3 4 4 4 3 4 4 4 ...

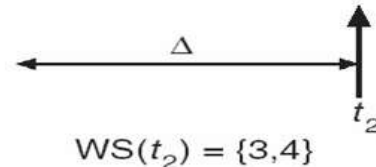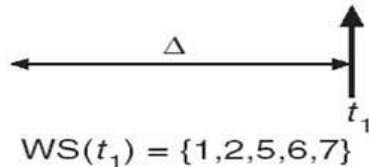



# Keeping Track of the Working Set



- Approximate with interval timer + a reference bit
- Example:  $\Delta = 10,000$ 
  - Timer interrupts after every 5000 time units
  - Keep in memory 2 bits for each page
  - Whenever a timer interrupts copy and sets the values of all reference bits to 0
  - If one of the bits in memory = 1  $\Rightarrow$  page in working set
- Why is this not completely accurate?
- Improvement = 10 bits and interrupt every 1000 time units



# Page-Fault Frequency



- More direct approach than WSS
- Establish “acceptable” **page-fault frequency (PFF)** rate and use local replacement policy
  - If actual rate too low, process loses frame
  - If actual rate too high, process gains frame

