



SNS COLLEGE OF TECHNOLOGY

Coimbatore-35.



An Autonomous Institution

- **COURSE NAME : 23CST202– OPERATING SYSTEMS**
 - **II YEAR/ IV SEMESTER**
 - **UNIT-III Memory Management**
- **Topic: Virtual Memory Background Demand Paging**

•

Dr. B.Vinodhini
Associate Professor
Department of Computer Science and Engineering



Background



- **Virtual memory** –separation of user logical memory from physical memory
 - Only part of the program needs to be in memory for execution
 - Logical address space can therefore be much larger than physical address space
 - Allows address spaces to be shared by several processes
 - Allows for more efficient process creation
 - More programs running concurrently
 - Less I/O needed to load or swap processes




Background (Cont.)

- **Virtual address space** – logical view of how process is stored in memory
 - Usually start at address 0, contiguous addresses until end of space
 - Meanwhile, physical memory organized in page frames
 - MMU must map logical to physical
- Virtual memory can be implemented via:
 - **Demand paging**
 - **Demand segmentation**




Virtual Memory That is Larger Than Physical Memory

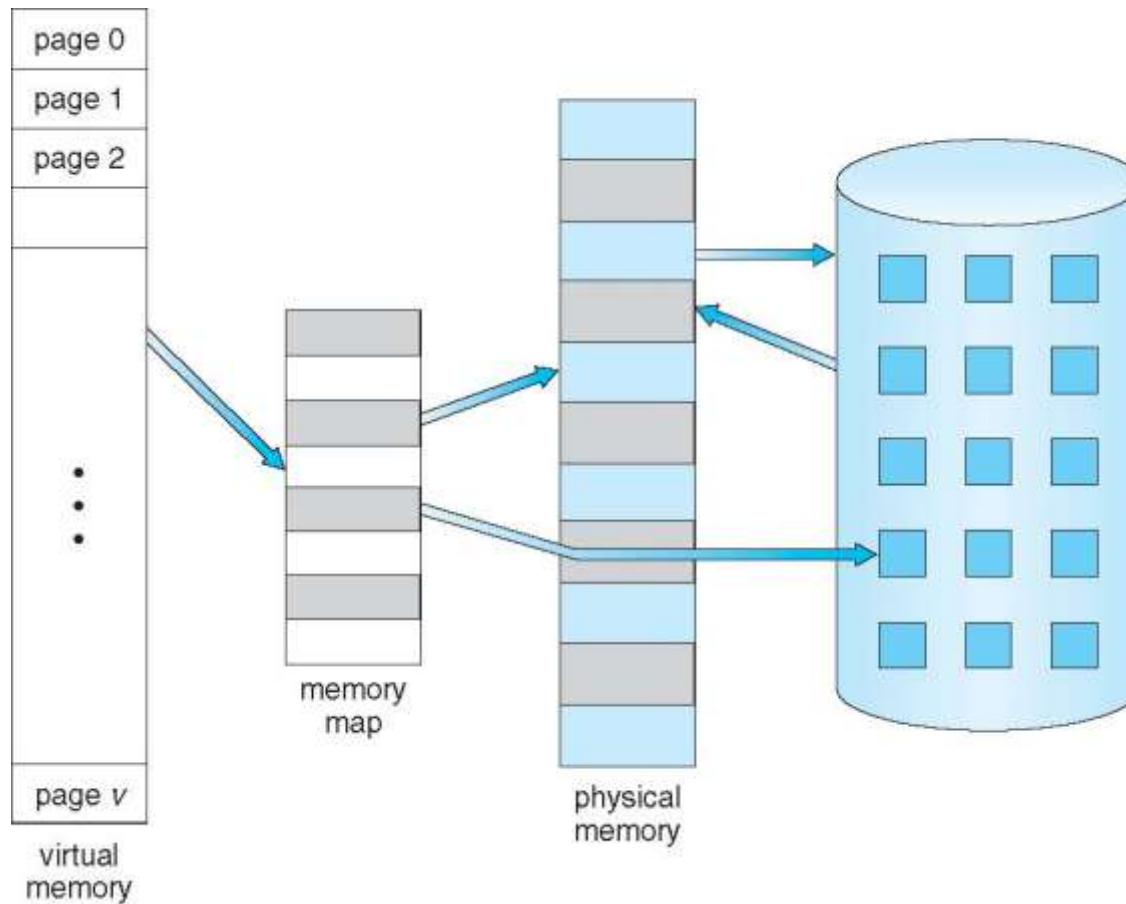




Data Structure

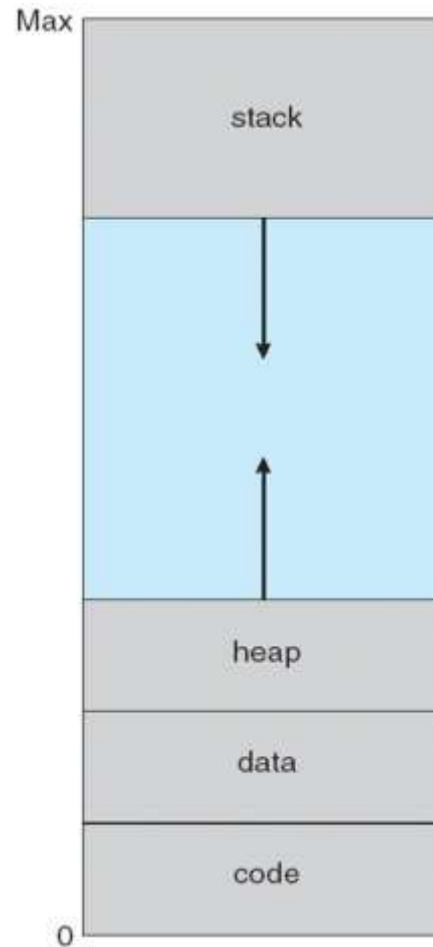



Demand Paging

- Could bring entire process into memory at load time
- Or bring a page into memory only when it is needed
 - Less I/O needed, no unnecessary I/O
 - Less memory needed
 - Faster response
 - More users
- Similar to paging system with swapping (diagram on right)
- Page is needed \Rightarrow reference to it
 - invalid reference \Rightarrow abort
 - not-in-memory \Rightarrow bring to memory
- **Lazy swapper** – never swaps a page into memory unless page will be needed
 - Swapper that deals with pages is a **pager**

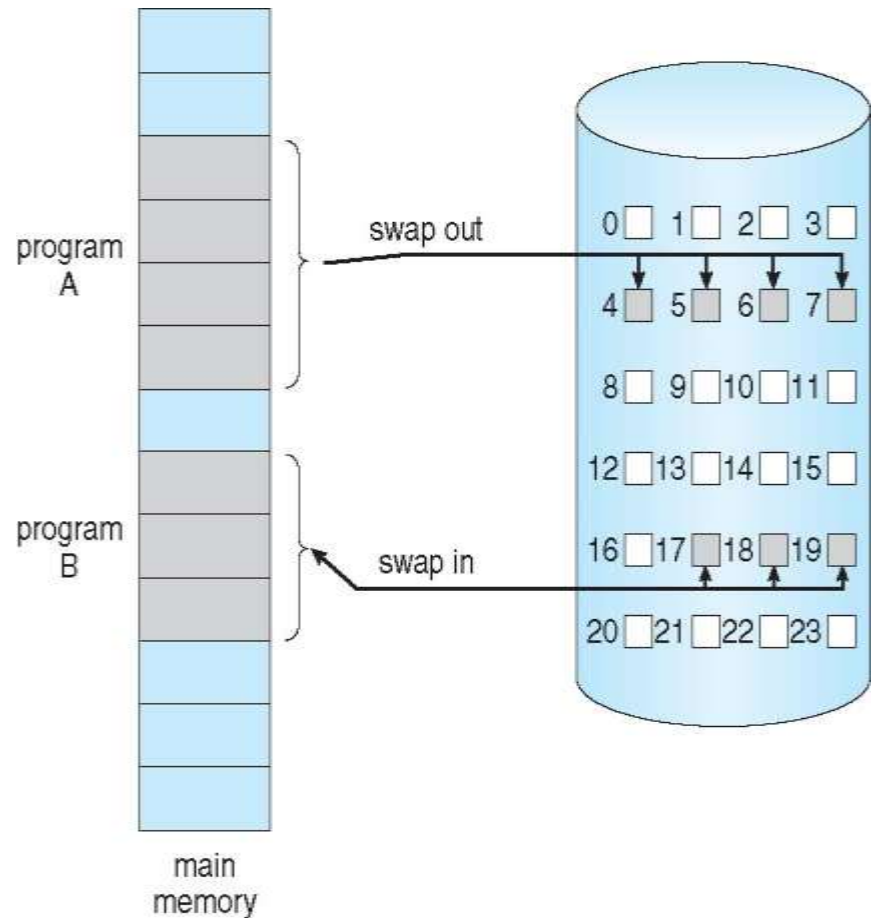



Basic Concepts



- With swapping, pager guesses which pages will be used before swapping out again
- Instead, pager brings in only those pages into memory
- How to determine that set of pages?
 - Need new MMU functionality to implement demand paging
- If pages needed are already **memory resident**
 - No difference from non demand-paging
- If page needed and not memory resident
 - Need to detect and load the page into memory from storage
 - Without changing program behavior
 - Without programmer needing to change code



Valid-Invalid Bit

- With each page table entry a valid–invalid bit is associated (**v** \Rightarrow in-memory – **memory resident**, **i** \Rightarrow not-in-memory)
- Initially valid–invalid bit is set to **i** on all entries
- Example of a page table snapshot:

Frame #	valid-invalid bit
	v
	v
	v
	i
...	
	i
	i

page table

- During MMU address translation, if valid–invalid bit in page table entry is **i** \Rightarrow page fault



Page Table When Some Pages Are Not in Main Memory



0	A
1	B
2	C
3	D
4	E
5	F
6	G
7	H


logical
memory

valid-invalid bit	
frame	bit
0	4 v
1	i
2	6 v
3	i
4	i
5	9 v
6	i
7	i

page table

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15

physical memory

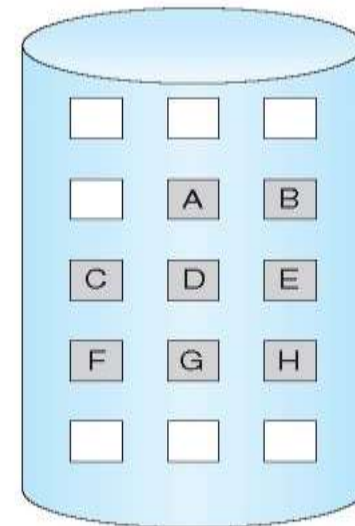



Page Fault



- If there is a reference to a page, first reference to that page will trap to operating system:

page fault

1. Operating system looks at another table to decide:
 - Invalid reference \Rightarrow abort
 - Just not in memory
2. Find free frame
3. Swap page into frame via scheduled disk operation
4. Reset tables to indicate page now in memory
Set validation bit = **v**
5. Restart the instruction that caused the page fault



Steps in Handling a Page Fault

