

#### SNS COLLEGE OF TECHNOLOGY



Coimbatore-35.

#### **An Autonomous Institution**

**COURSE NAME: 23CSE201 OPERATING SYSTEMS** 

II YEAR/ IV SEMESTER

UNIT-I OVERVIEW AND PROCESS MANAGEMENT

**Topic: Storage Management ,Operating System Services** 

Dr.B. Vinodhini
Associate Professor
Department of Computer Science and Engineering



#### SNS COLLEGE OF TECHNOLOGY



(Autonomous ) COIMBATORE-35

#### **Operating Systems**









#### Storage Management



- OS provides uniform, logical view of information storage
  - Abstracts physical properties to logical storage unit file
  - Each medium is controlled by device (i.e., disk drive, tape drive)
    - Varying properties include access speed, capacity, datatransfer rate, access method (sequential or random)
- File-System management
  - Files usually organized into directories
  - Access control on most systems to determine who can access what
  - OS activities include
    - Creating and deleting files and directories
    - Primitives to manipulate files and dirs
    - Mapping files onto secondary storage
    - Backup files onto stable (non-volatile) storage media

#### Hierarchical Directory




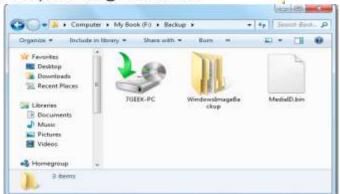






#### Introduction

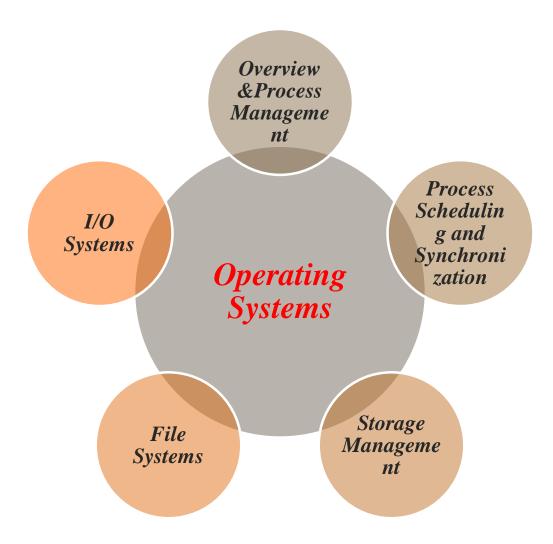






# Storage Management

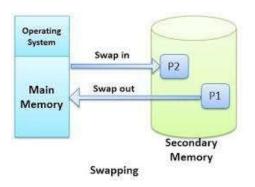

### Storage Management

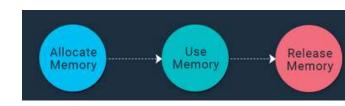

Page Replacement


O I V

O Dity" Bit - avoid page out

Page I able

Memory
Management
Swapping,
Paging and
Segmentation

Virtual Memory
Demand Paging
Page
Replacement
Allocation of
Frames





# Mass Storage Management



2 3

10 111

12 13 14 15 16 17 18 19 19 123 123 123 124 125 126 127 128 128 129 130 131 1

- Usually disks used to store data that does not fit in main memory or data that must be kept for a "long" period of time
- Proper management is of central importance
- Entire speed of computer operation hinges on disk subsystem and its algorithms
- OS activities
  - Free-space management
  - Storage allocation
  - Disk scheduling
- Some storage need not be fast
  - Tertiary storage includes optical storage, magnetic tape
  - Still must be managed by OS or applications


 Varies between WORM (write-once, read-many-times) and RW (read-write)






# I/O Subsystems

- One purpose of OS is to hide peculiarities of hardware devices from the user
- I/O subsystem responsible for
  - Memory management of I/O including buffering (storing data temporarily while it is being transferred), caching (storing parts of data in faster storage for performance), spooling (the overlapping of output of one job with input of other jobs)
  - General device-driver interface
  - Drivers for specific hardware devices

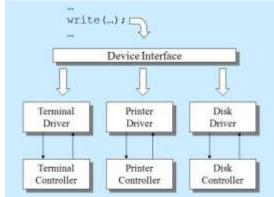





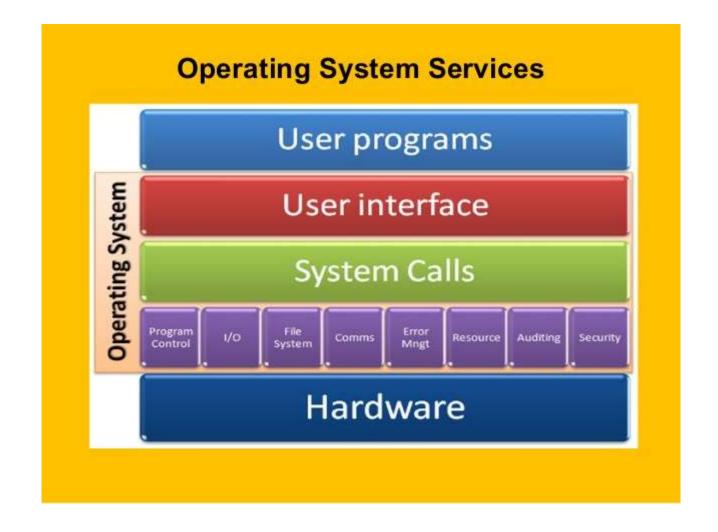





- Operating systems provide an environment for execution of programs and services to programs and users
- One set of operating-system services provides functions that are helpful to the user:
  - User interface Almost all operating systems have a user interface (UI).
    - Varies between Command-Line (CLI), Graphics User Interface (GUI),
       Batch
  - Program execution The system must be able to load a program into memory and to run that program, end execution, either normally or abnormally (indicating error)
  - I/O operations A running program may require I/O, which may involve a file or an I/O device
  - File-system manipulation The file system is of particular interest.
     Programs need to read and write files and directories, create and delete them, search them, list file Information, permission management.





- Communications Processes may exchange information, on the same computer or between computers over a network
  - Communications may be via shared memory or through message passing (packets moved by the OS)
- Error detection OS needs to be constantly aware of possible errors
  - May occur in the CPU and memory hardware, in I/O devices, in user program
  - For each type of error, OS should take the appropriate action to ensure correct and consistent computing
  - Debugging facilities can greatly enhance the user's and programmer's abilities to efficiently use the system





- Another set of OS functions exists for ensuring the efficient operation of the system itself via resource sharing
  - Resource allocation When multiple users or multiple jobs running concurrently, resources must be allocated to each of them
    - Many types of resources Some (such as CPU cycles, main memory, and file storage) may have special allocation code, others (such as I/O devices) may have general request and release code
  - Accounting To keep track of which users use how much and what kinds of computer resources
  - Protection and security The owners of information stored in a multiuser or networked computer system may want to control use of that information, concurrent processes should not interfere with each other
    - Protection involves ensuring that all access to system resources is controlled
    - Security of the system from outsiders requires user authentication, extends to defending external I/O devices from invalid access attempts
    - If a system is to be protected and secure, precautions must be instituted throughout it. A chain is only as strong as its weakest link.




### Types of System Calls



#### Process control

- end, abort
- load, execute
- create process, terminate process
- get process attributes, set process attributes
- wait for time
- wait event, signal event
- allocate and free memory
- File management
  - create file, delete file
  - open, close file
  - read, write, reposition
  - get and set file attributes

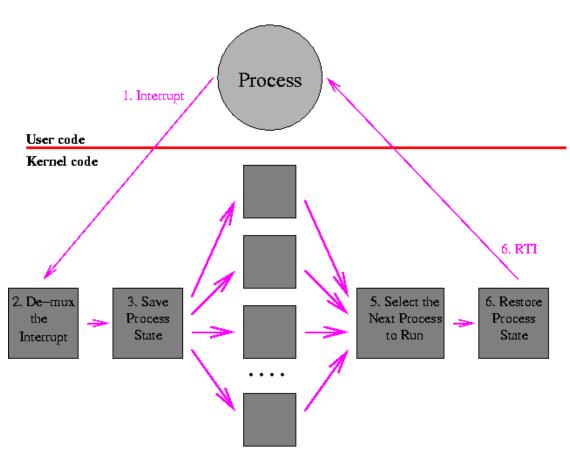

4. Perform the Appropriate Operation



### Types of System Calls



- Device management
  - request device, release device
  - read, write, reposition
  - get device attributes, set device attributes
  - logically attach or detach devices
- Information maintenance
  - get time or date, set time or date
  - get system data, set system data
  - get and set process, file, or device attributes
- Communications
  - create, delete communication connection
  - send, receive messages
  - transfer status information
  - attach and detach remote devices





- System programs provide a convenient environment for program development and execution. They can be divided into:
  - File manipulation
  - Status information
  - File modification
  - Programming language support
  - Program loading and execution
  - Communications
  - Application programs
- Most users' view of the operation system is defined by system programs, not the actual system calls





#### **Application Programs: -**

MS Office, Banking System

#### System Program: -

**Editors, Compiler and Command Interpreter** 

#### **Operating System**

**Physical Devices/Computer hardware** 





- Provide a convenient environment for program development and execution
  - Some of them are simply user interfaces to system calls; others are considerably more complex
- File management Create, delete, copy, rename, print, dump, list, and generally manipulate files and directories

#### Status information

- Some ask the system for info date, time, amount of available memory, disk space, number of users
- Others provide detailed performance, logging, and debugging information
- Typically, these programs format and print the output to the terminal or other output devices
- Some systems implement a registry used to store and retrieve configuration information





#### File modification

- Text editors to create and modify files
- Special commands to search contents of files or perform transformations of the text
- Programming-language support Compilers, assemblers, debuggers and interpreters sometimes provided
- Program loading and execution- Absolute loaders, relocatable loaders, linkage editors, and overlay-loaders, debugging systems for higher-level and machine language
- Communications Provide the mechanism for creating virtual connections among processes, users, and computer systems
  - Allow users to send messages to one another's screens, browse web pages, send electronic-mail messages, log in remotely, transfer files from one machine to another





# Summarization