



SNS COLLEGE OF TECHNOLOGY

Coimbatore-35.

An Autonomous Institution

**Accredited by NBA – AICTE and Accredited by NAAC – UGC with ‘A++’ Grade
Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai**

COURSE NAME : OPERATING SYSTEMS

II YEAR/ IV SEMESTER

UNIT – IV FILE SYSTEMS

Topic : File Mounting and File Sharing

Dr.B.Vinodhini

Associate Professor

Department of Computer Science and Engineering






SNS COLLEGE OF TECHNOLOGY

(Autonomous)
COIMBATORE-35



Mounting The FileSystem

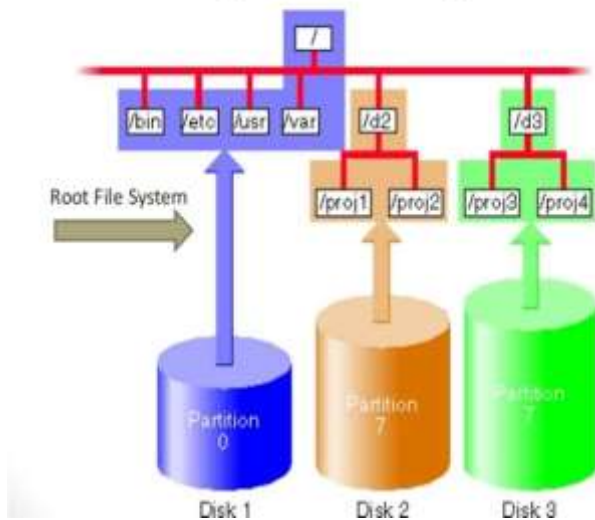


File Mounting

File Sharing


	Read	Write/Delete	Execute
Owner	Yes	Yes	No
Group	Yes	No	No
World	No	No	No

File System Mounting

- A file system must be **mounted** before it can be accessed
- A unmounted file system is mounted at a **mount point**

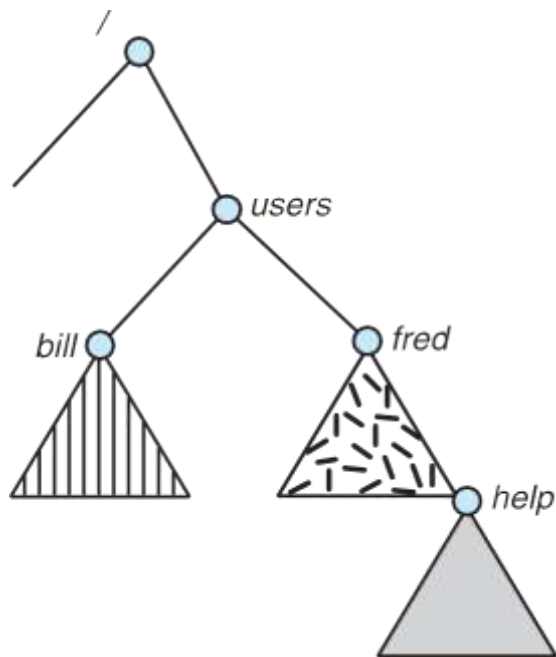


(a)

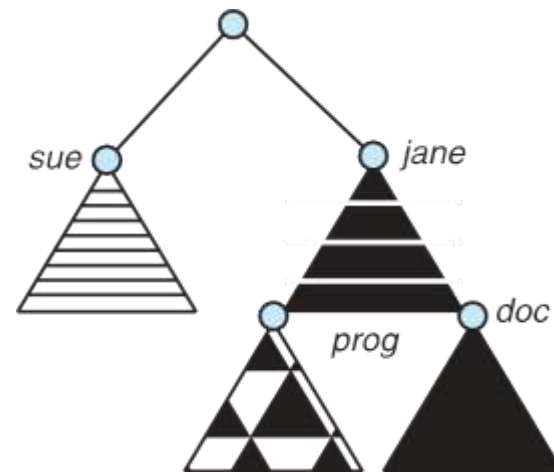

(b)

Mount Point

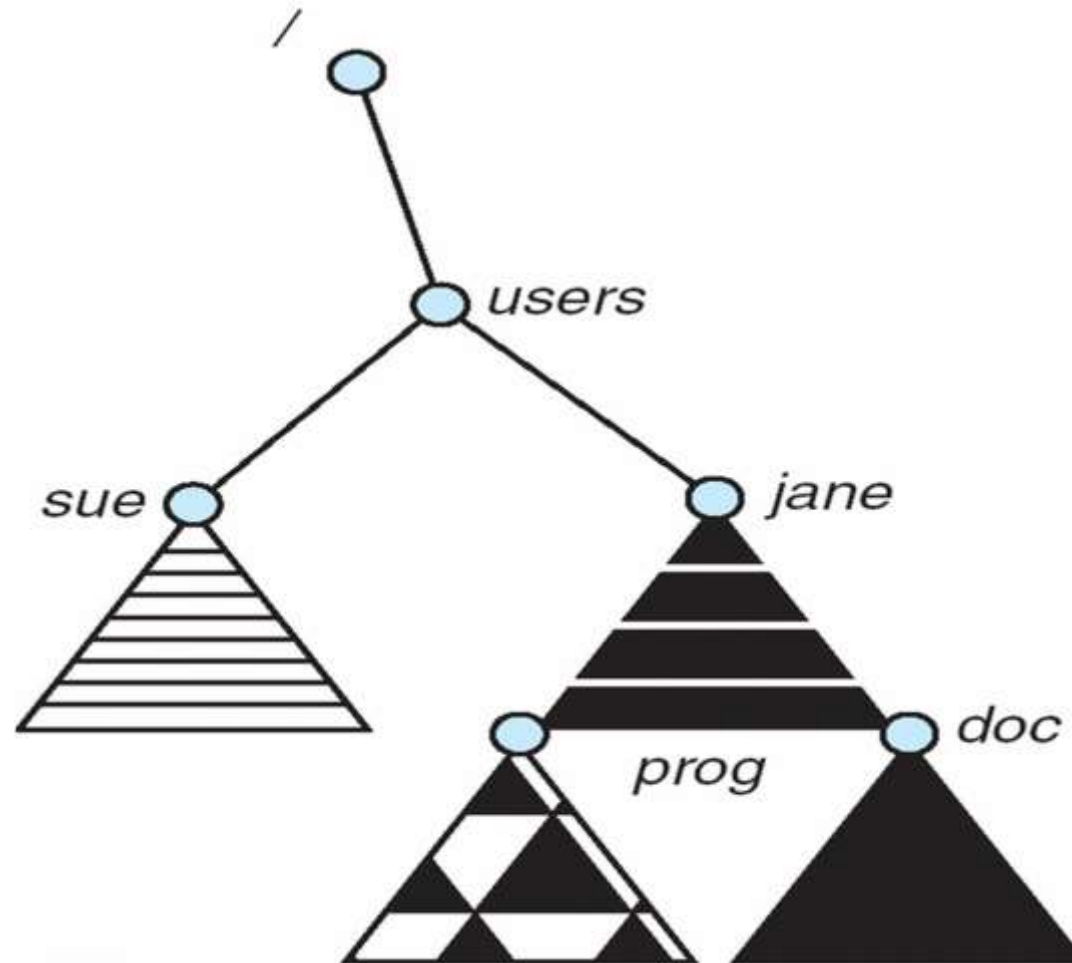

File Sharing

- Sharing of files on multi-user systems is desirable
- Sharing may be done through a **protection** scheme
- On distributed systems, files may be shared across a network
- Network File System (NFS) is a common distributed file-sharing method
- If multi-user system
 - **User IDs** identify users, allowing permissions and protections to be per-user
 - Group IDs** allow users to be in groups, permitting group access rights
 - Owner of a file / directory
 - Group of a file / directory

File Sharing – Remote File Systems

- Uses networking to allow file system access between systems
 - Manually via programs like FTP
 - Automatically, seamlessly using **distributed file systems**
 - Semi automatically via the **world wide web**
- **Client-server** model allows clients to mount remote file systems from servers
 - Server can serve multiple clients
 - Client and user-on-client identification is insecure or complicated
 - **NFS** is standard UNIX client-server file sharing protocol
 - **CIFS** is standard Windows protocol
 - Standard operating system file calls are translated into remote calls
- Distributed Information Systems (**distributed naming services**) such as LDAP, DNS, NIS, Active Directory implement unified access to information needed for remote computing

File Sharing – Failure Modes

- All file systems have failure modes
 - For example corruption of directory structures or other non-user data, called **metadata**
- Remote file systems add new failure modes, due to network failure, server failure
- Recovery from failure can involve **state information** about status of each remote request
- **Stateless** protocols such as NFS v3 include all information in each request, allowing easy recovery but less security

File Sharing – Consistency Semantics

- Specify how multiple users are to access a shared file simultaneously
 - Tend to be less complex due to disk I/O and network latency (for remote file systems)
- Andrew File System (AFS) implemented complex remote file sharing semantics
- Unix file system (UFS) implements:
 - Writes to an open file visible immediately to other users of the same open file
 - Sharing file pointer to allow multiple users to read and write concurrently
- AFS has session semantics
 - Writes only visible to sessions starting after the file is closed

Protection


- File owner/creator should be able to control:
 - what can be done
 - by whom
- Types of access
 - **Read**
 - **Write**
 - **Execute**
 - **Append**
 - **Delete**
 - **List**

Access Lists and Groups

- Mode of access: read, write, execute
- Three classes of users on Unix / Linux

			RWX
a) owner access	7	⇒	1 1 1 RWX
b) group access	6	⇒	1 1 0 RWX
c) public access	1	⇒	0 0 1

- Ask manager to create a group (unique name), say G, and add some users to the group.
- For a particular file (say *game*) or subdirectory, define an appropriate access.

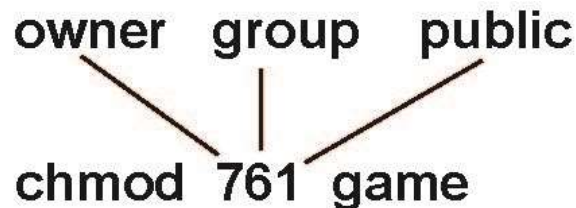

Attach a group to a file

chgrp G game



Summarization

